


Cellular Isolator, “ee” Package RI-Flow-Fhi-ee-XW-Direction(-R or -L)

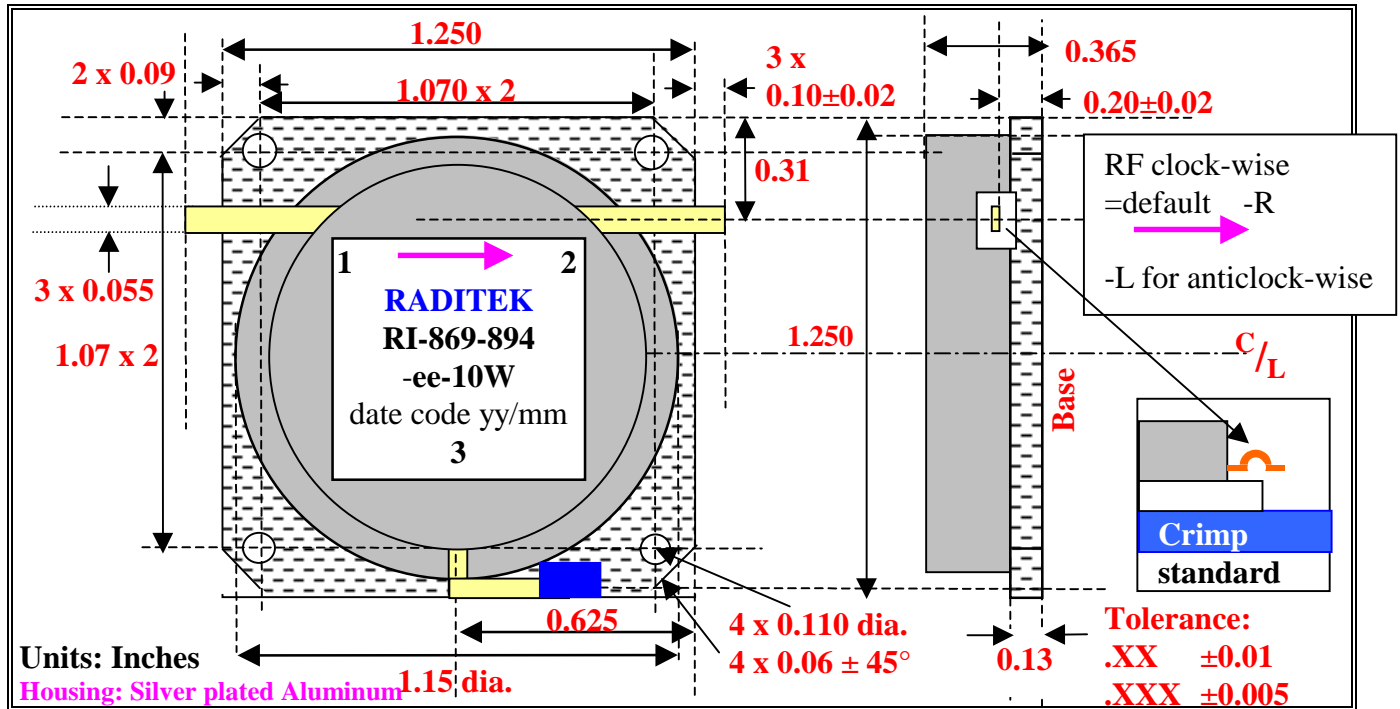

Specifications (over full operating temperature range)

| | Standard | |
|--|-------------|-----------|
| Frequency (F _{LO} F _{HI}) | 869-894 | GHz |
| Circulation | R | |
| Rated power FORWARD (average) | 250 | Watts max |
| Rated power FORWARD (peak) | 1200 | Watts max |
| Rated power REVERSE (average) | 10 | Watts max |
| Insertion loss (S ₂₃ ,S ₂₁) max | 0.3 | dB |
| Isolation (S ₃₂ , S ₁₂) Min | 22 | dB |
| VSWR | 1.2 | :1 |
| Operating Temperature | -30 to +85 | C |
| Storage Temperature | -54 to +110 | C |