


RADITEK INC.

Ceramic Band Pass Filter 3350-3650 MHz, Model 1007, 3 Watts, Surface Mount RBPF-3350-3650M-1007-3W-S

code-k

For Use With WI-MAX Applications

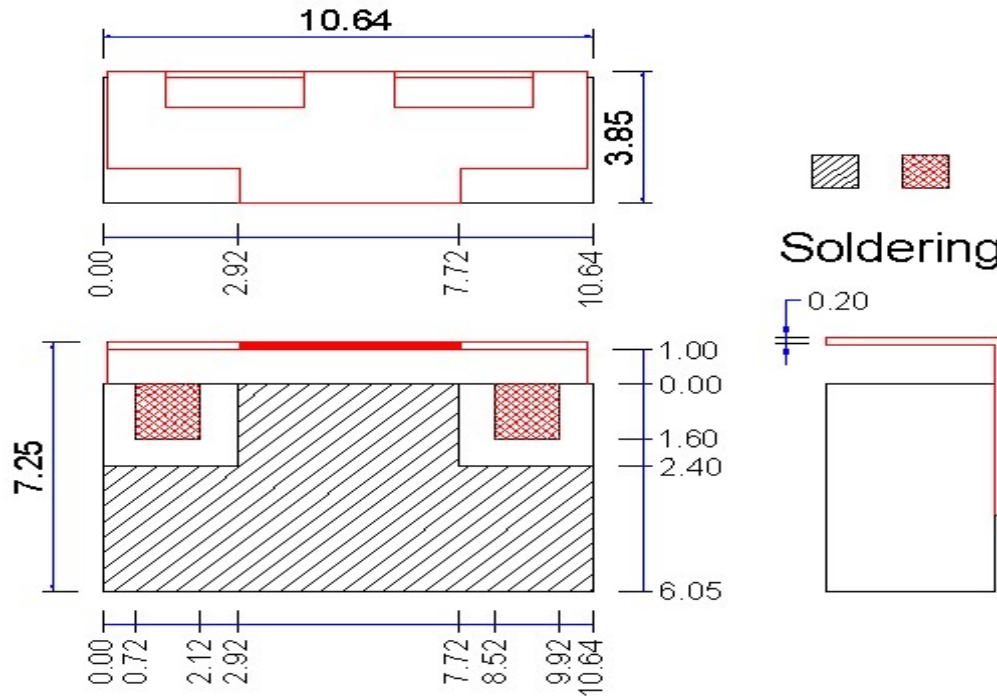

Specifications		Units
Frequency	3350-3650	MHz
Center frequency	3500	MHz
Bandwidth	Fo±150MHz	MHz
Insertion loss	1.3	dB max
Ripple	0.8	dB max
Return Loss	15.0	dB min
Attenuation	35 dB @ Fc ± 3000 MHz 35 dB @ Fc ± 4000 MHz	
Variation	5.0 ns max	
Input Power	3	Watt max
Impedance	50	Ohm
Operating Temp	-40 to +85	°C

RBPF-3350-3650M-1007-3W-S-k **Specifications may be subject to change**

05/22/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com