


**Coupler, 800-1000MHz, 20dB Coupling
Surface Mount, 100 Watts**

code-z4

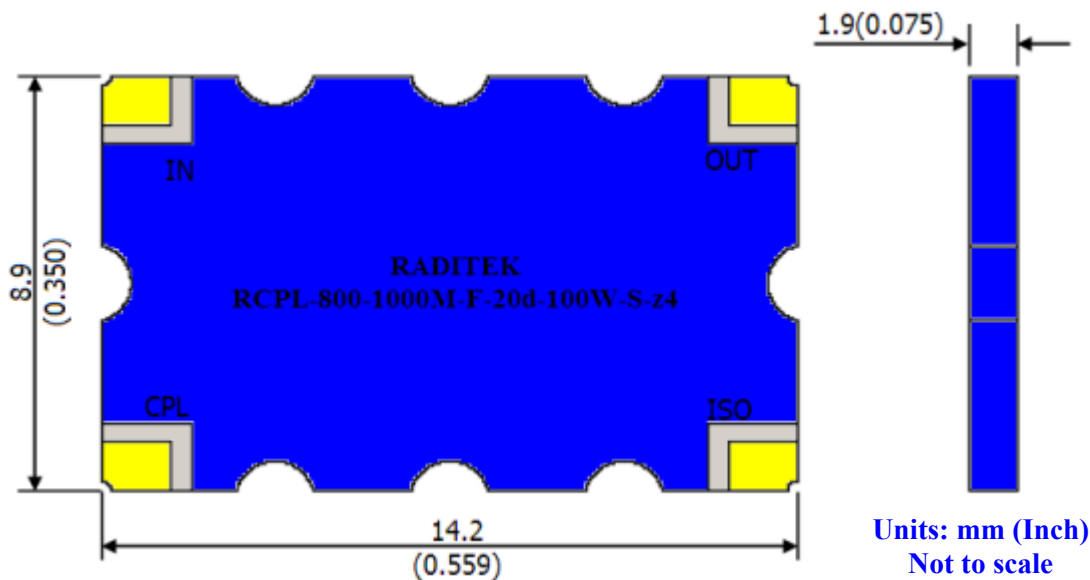

☎ Order Examples: RCPL-800-1000M-F-20d-100W-S

Description: (Coupler, 800-1000MHz, F package, 20dB Coupling, 100 Watts, Surface Mount)

Specifications			Units
Frequency Range	800-1000	860-960	MHz
Insertion Loss	0.25	0.25	dB (max)
Return Loss	20.0	20.0	dB min
Coupling Value	20±1.0	20±1.0	dB max
Directivity	20.0	20.0	dB min
Coupling Flatness	±0.5	±0.5	dB (max)
Power	100	100	Watts max
Impedance	50	50	Ω
Type	Surface Mount	Surface Mount	
Operating Temperature	-40 to +85	-40 to +85	°C