


Coupler, 1700-2500MHz, 25dB Coupling N-Type Female Connectors, 20 Watts

code-z4

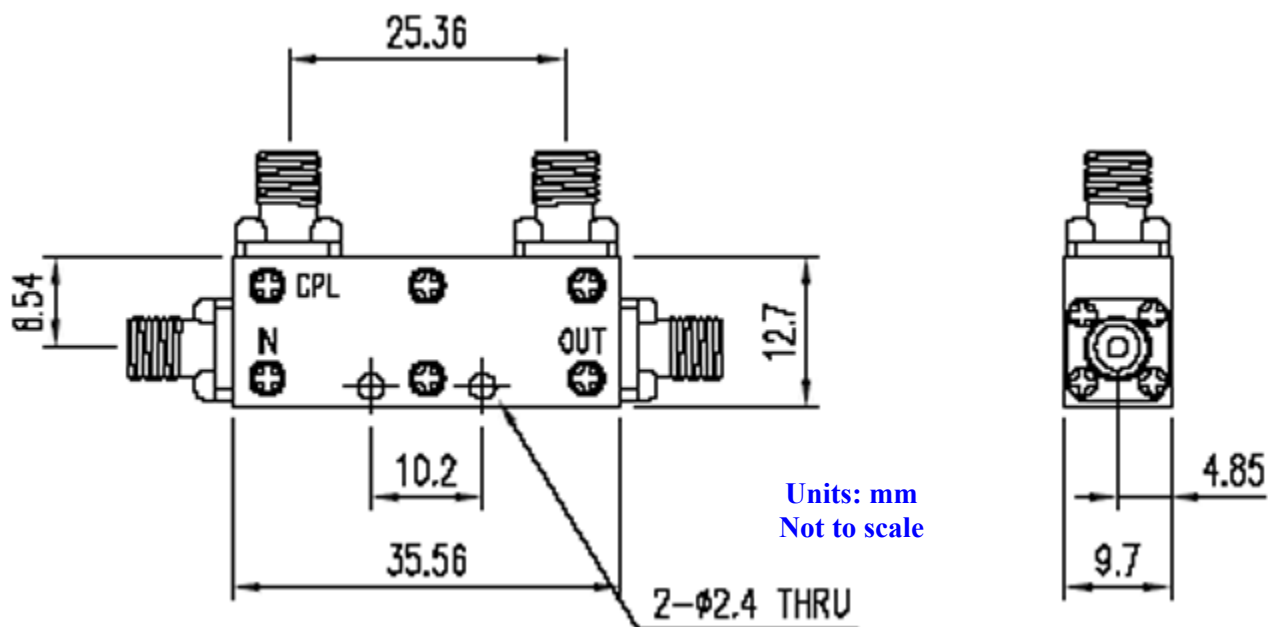

Order Examples: RCPL-1700-2500M-25d-N(f)-20W

Description: (Coupler, 1700-2500MHz, 25dB Coupling, N-Type Female Connectors, 20 Watts)

Specifications		Units
Frequency Range	1700-2500	MHz
Insertion Loss	0.4	dB (max)
VSWR	1.3	:1 max
Coupling Value	25±1.0	dB max
Coupling Flatness	±0.6	dB (max)
Directivity	20.0	dB min
Power	20	Watts max
Impedance	50	Ω
Connectors	N-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	