


Coupler, 2-8 GHz, 10dB Coupling SMA Female Connectors, 20 Watts

code-z4

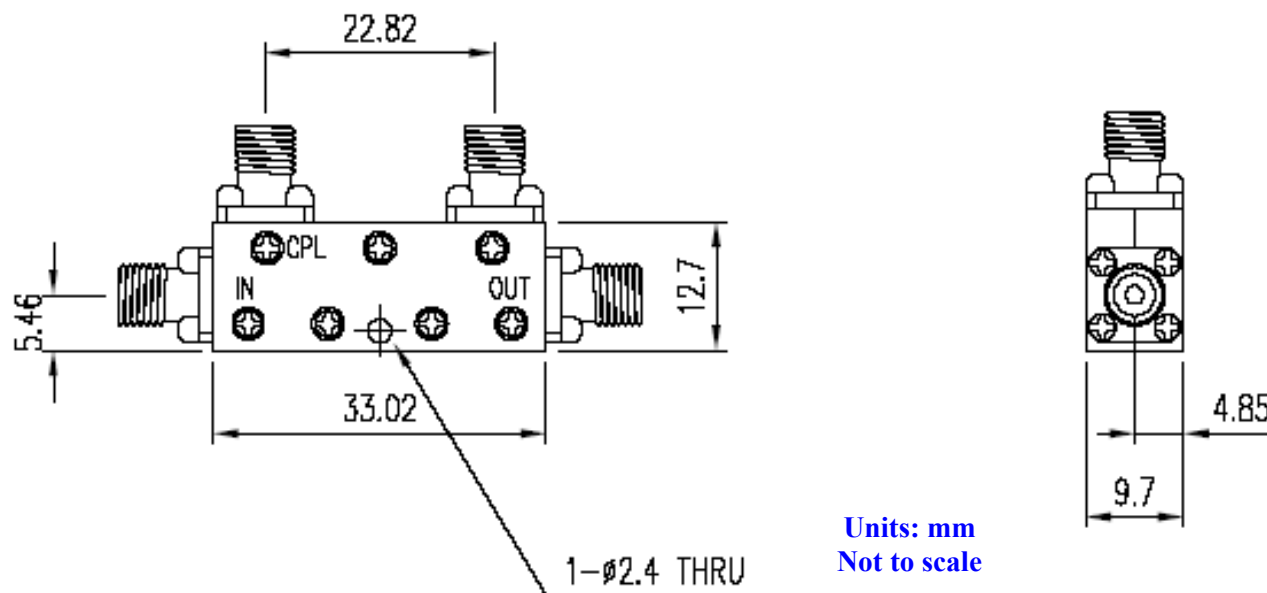

☎ Order Examples: RCPL-2-8-10d-S(f)-20W-z4

Description: (Coupler, 2-8GHz, 10dB Coupling, SMA Female Connectors, 20 Watts)

Specifications		Units
Frequency Range	2-8	MHz
Insertion Loss	0.9	dB (max)
VSWR	1.3	:1 max
Coupling Value	10±1.2	dB max
Coupling Flatness	±0.75	dB (max)
Directivity	16.0	dB min
Power	20	Watts max
Impedance	50	Ω
Connectors	SMA-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	