


## Coupler, 500-1000 MHz, 20dB Coupling SMA Female Connectors, 50 Watts

code-z4

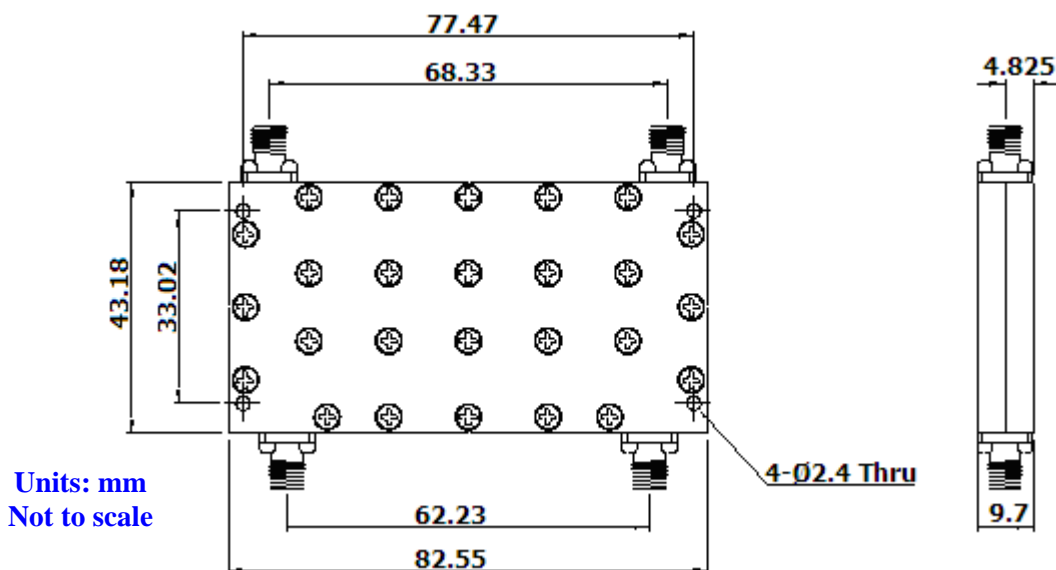

**☎ Order Examples: RCPL-500-1000M-20dB-S(f)-50W**

**Description: (Coupler, 500-1000 MHz, 20dB Coupling, SMA Female Connectors, 50 Watts)**

Specifications		Units
Frequency Range	500-1000	MHz
Insertion Loss	3.7	dB (max)
VSWR	1.3:1	max
Coupling Deviation	±0.5	dB (max)
Isolation	20.0	dB (min)
Phase Balance	180±5°	Max
Power	50	Watts (max)
Impedance	50	Ohm
Connector	SMA-female	
Temperature Range	-40 to 85	°C