


RADITEK INC.

Ceramic Duplexer

806-824MHz / 851-869MHz, Model 4320, 3 Watts, Surface Mount

RDUP-806-824M-851-869M-4320-3W-S-ca-j

code-j

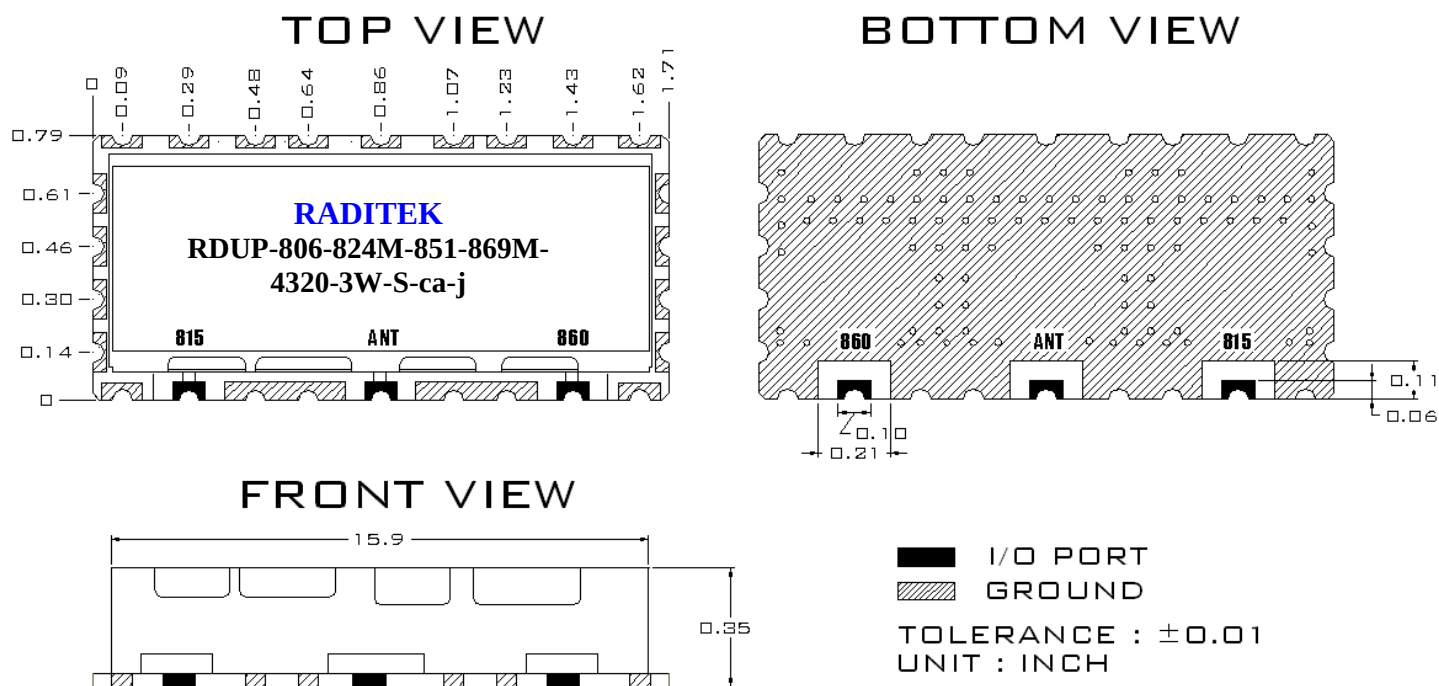

Order Examples: RDUP-806-824M-851-869M-4320-3W-S-ca-j

Description: (Duplexer, 806-824MHz / 851-869MHz, Model 4320, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 806-824 MHz	RX 851-869 MHz
Center Frequency [fo]	815 MHz	860 MHz
Bandwidth [BW]	$f_o \pm 9$ min. [806 ~ 824]	$f_o \pm 9$ min. [851 ~ 869]
Insertion Loss at fo	3.0 dB max.	3.0 dB max.
Ripple in BW	1.5 dB max.	1.5 dB max.
Return Loss in BW	15.0 dB min.	15.0 dB min.
Input Power	3.0 W max.	
Attenuation [Absolute Value]	60 dB min. @ 851 ~ 869 MHz	60 dB min. @ 806 ~ 824 MHz
In/Out Impedance	50 Ω	
Operation Temperature Range	-40 to +85°C	

RDUP-806-824M-851-869M-4320-3W-S-ca-j

Specifications may be subject to change

06/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com

RADITEK INC.

Ceramic Duplexer

code-j

806-824MHz / 851-869MHz, Model 4320, 3 Watts, Surface Mount

RDUP-806-824M-851-869M-4320-3W-S-ca-j

RECOMMENDED PC BOARD PATTERN

