


RADITEK INC.

Dual Directional Coupler, 2.0-2.4 GHz 30dB Coupling, N-Type Female Connectors, 500 Watts

code-L

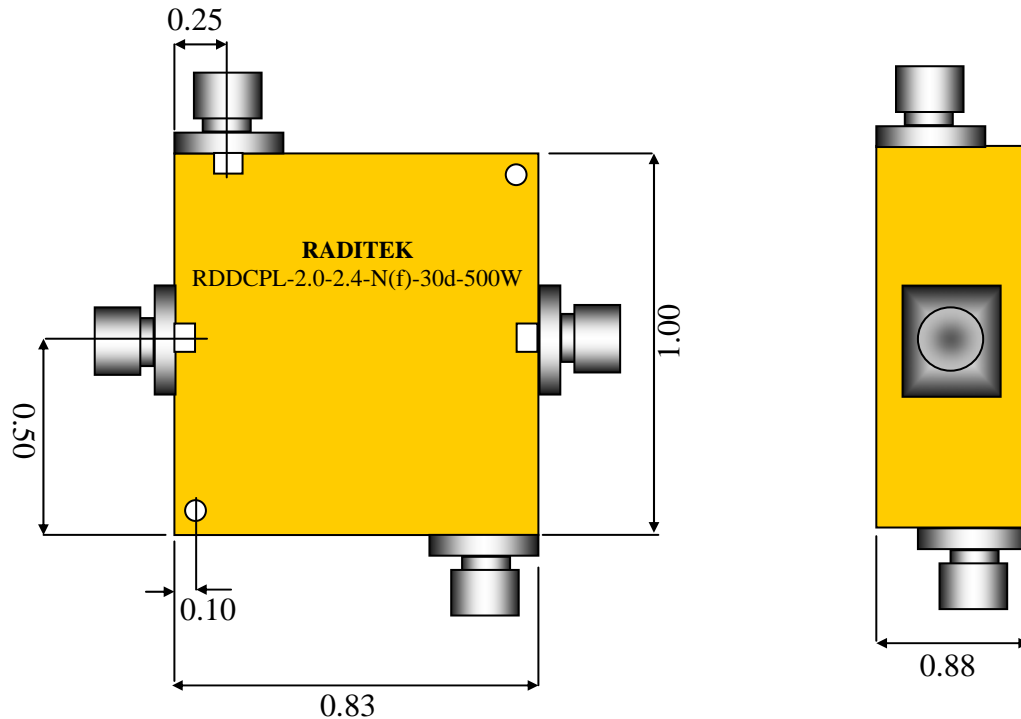

Specifications:		Units
Frequency	2.0-2.4	GHz
Insertion Loss:	0.2/0.15 typ	dB max
Coupling:	30+/-1.0	dB
VSWR:	1.10:1/1.065:1 typ	max
Power Handling:	500	watts
Peak Power:	10	kilo Watts
Operating Temp:	-40 + 80	deg/C
Directivity:	25	dB min
Storage Temp:	-55 + 95	
Altitude:	51000	feet
Impedence:	50	Ohms In/Out
Connectors:	N-Female	
Humidity:	95	%