


ROHS Compliant

RADITEK INC.

CIRCULATOR, STRIPLINE DROP-IN 1500-2000 MHz, 125 WATTS

code-b

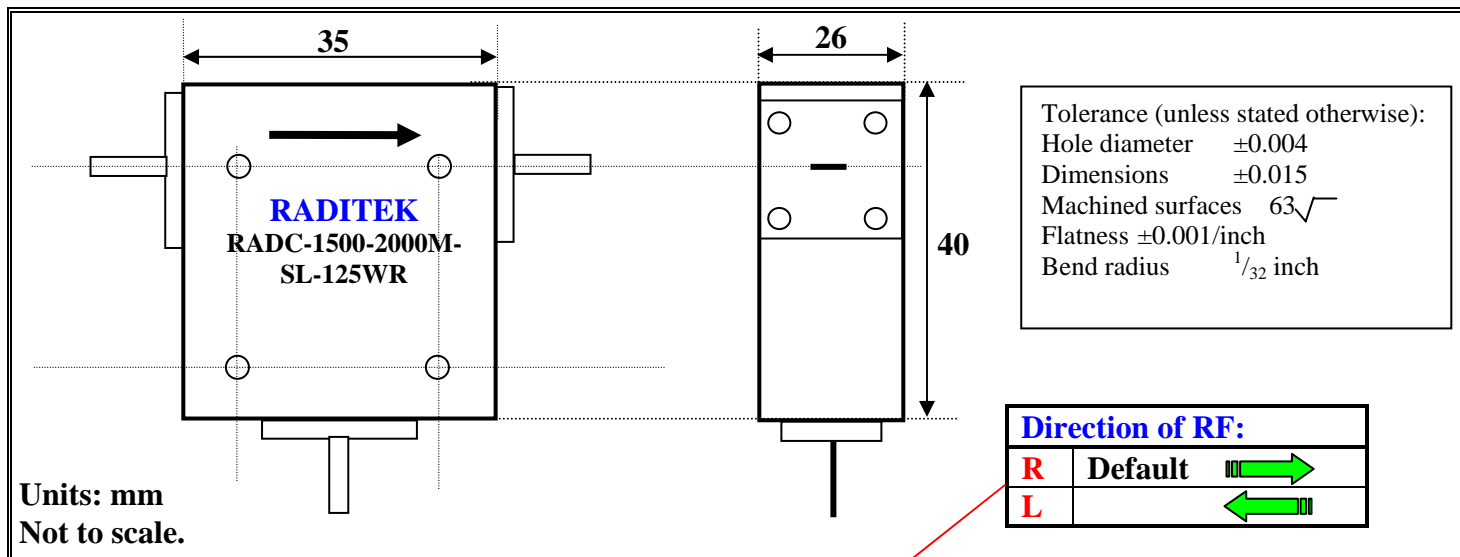

Order Examples: RADC-1500-2000M-SL-125WR

Specifications		Units
Frequency	1500-2000	MHz
Insertion loss	0.5	dB max
Isolation	18	dB min
VSWR	1.3:1	dB min typical
Power Forward	150	Watt
Power Reverse	125	Watts Average (Power In Load)
Operating temperature	0 to +55	°C