


CIRCULATOR, STRIPLINE DROP-IN 2.0-2.4 GHz, 400 WATTS

code-b

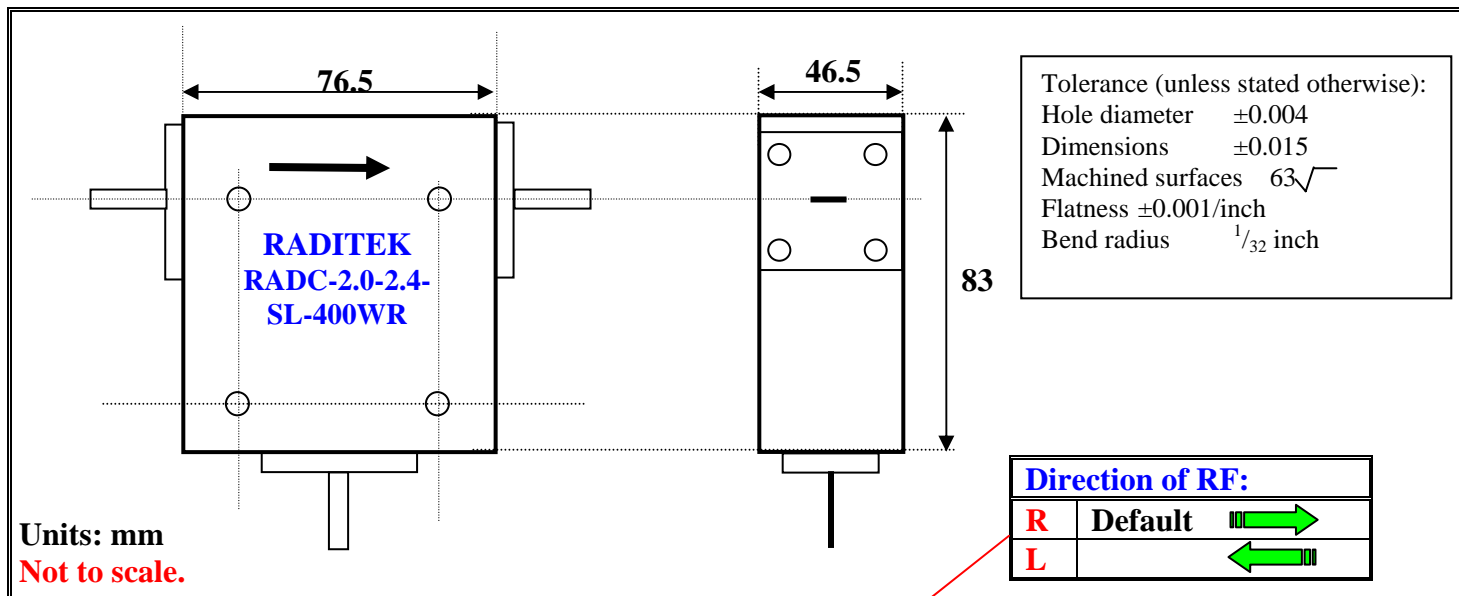

Order Examples: **RADC-2.0-2.4-SL-400WR**

Specifications:		Units
Frequency	2.0-2.4	GHz
Bandwidth	Full	
Insertion loss	0.5	dB (maximum)
Isolation	18	dB (minimum)
VSWR	1.25:1	
Rated power (Forward) & (reverse)	400	Watts (average)
Operating temperature	0 to +50	°C