


CIRCULATOR, STRIPLINE DROP-IN

code-b

345-355 MHz, 350 WATTS

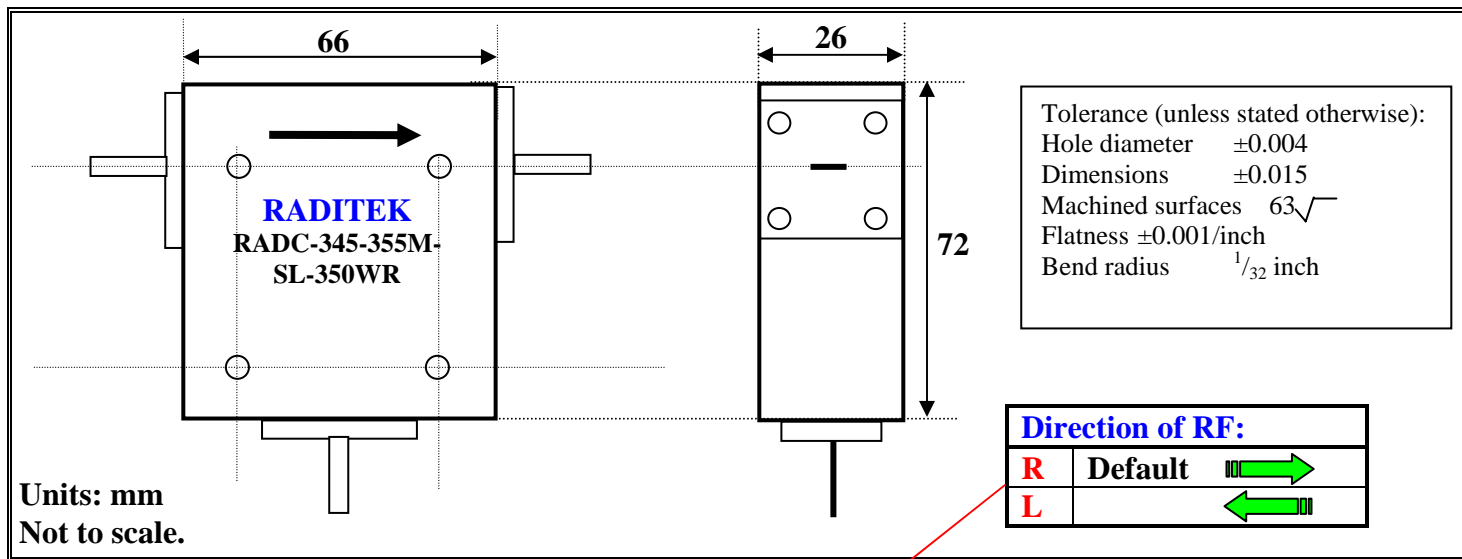

Order Examples: **RADC-345-355M-SL-350WR**

Specifications		Units
Frequency	345-355	MHz
Insertion loss	<0.5	dB max
Isolation	>20	dB min
VSWR	<1.3	dB min typical
Power (CW) Min	350	Watt
RF Connection	Tab type W=3.2mm, t=0.4mm	
Operating temperature	tba	°C