


RADITEK INC.

Ceramic Band Pass Filter 170-530MHz, Model 5526, Surface Mount RBPF-170-530M-5526-S

code-s

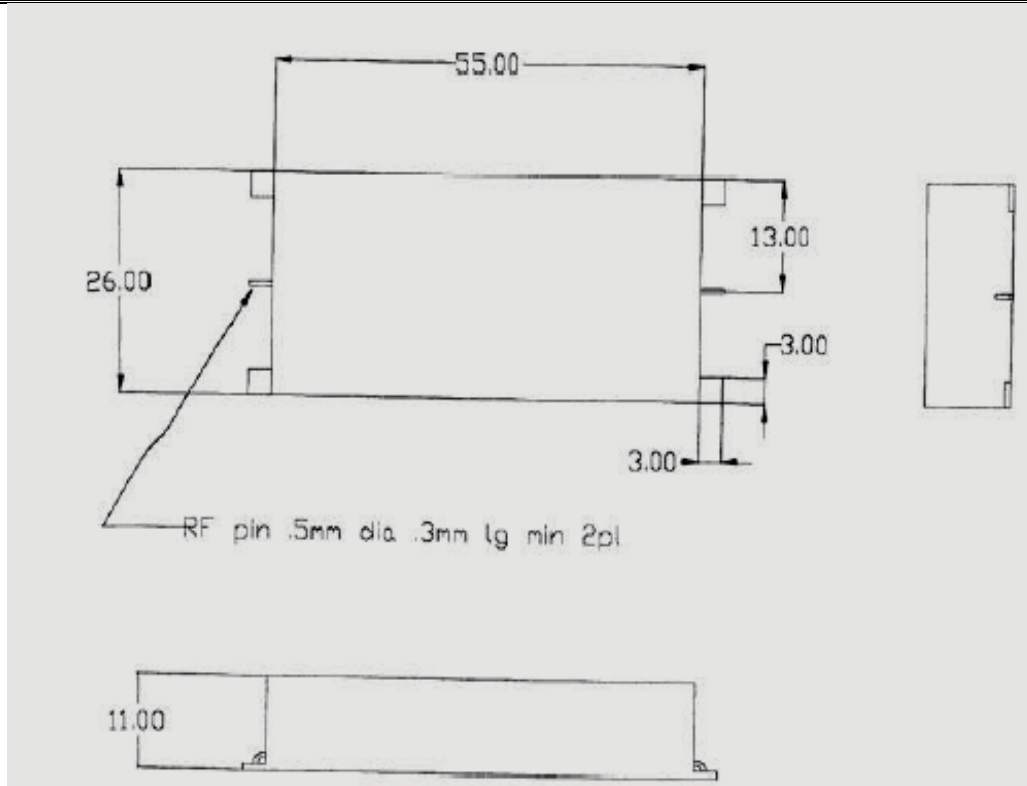

FREQ. BAND	170-530MHz
IL.	<1.2dB
RIPPLE	+/- 0.5dB
REJECT 15dB	<140MHz; >640MHz
30dB	<110MHz; >800MHz
VSWR	15dB
MAX Pin	20dBm
IIP2	70dBm
IL VS TEMP	+/- 0.5
TEMP.	-40 to 60 deg. C
SIZE	55 x 26 x 11 (mm)

RBPF-170-530M-5526-S-s

Specifications may be subject to change

05/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.


Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com

RADITEK INC.

Ceramic Band Pass Filter 170-530MHz, Model 5526, Surface Mount RBPF-170-530M-5526-S

code-s

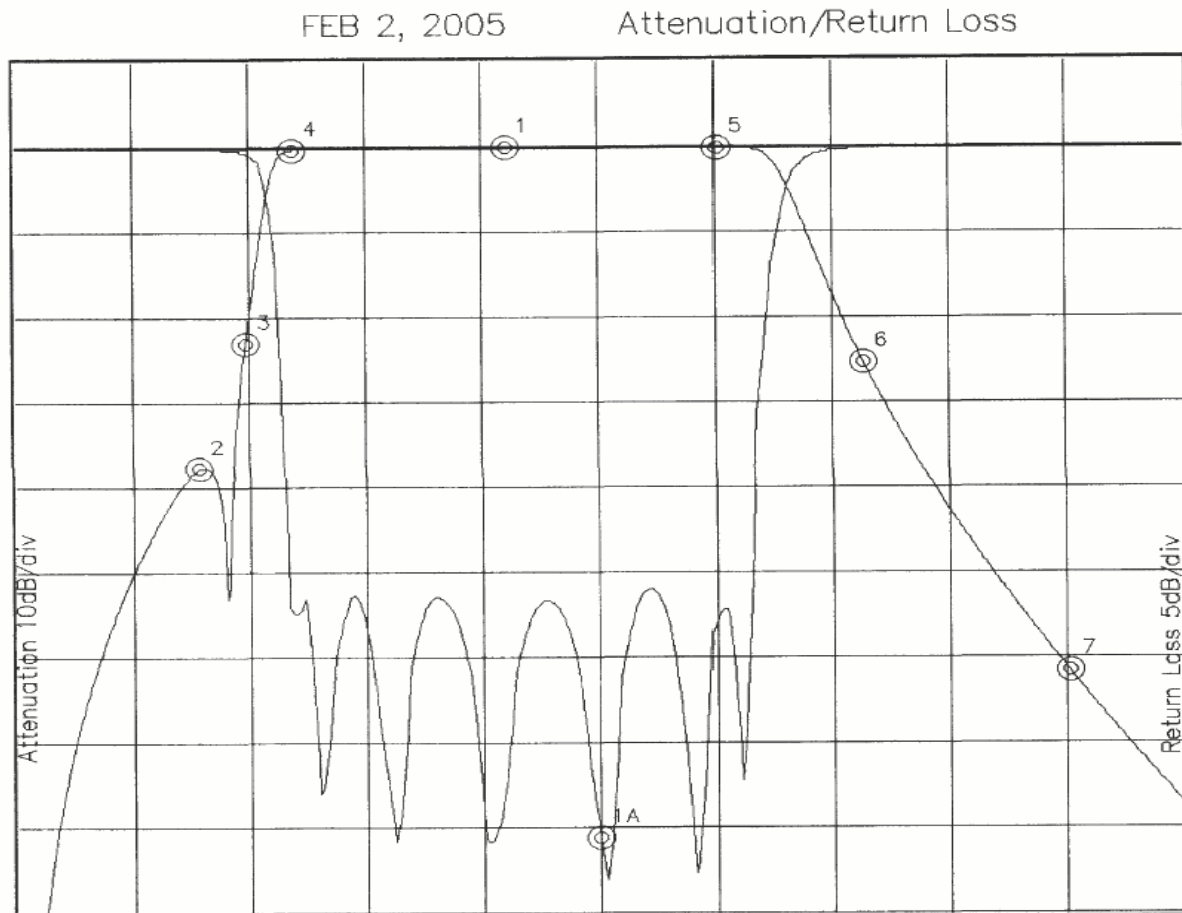

Attenuation Start: 0.20GHz Stop: 2.0GHz

Return Loss Start: 0.20GHz Stop: 2.0GHz

Offset -0.2173dB

Marker 1 Freq 840.06MHz Atten 0.013dB

Marker 1A Freq 998.38MHz Ret Loss -40.844dB

Marker 2 Freq 310.17MHz Atten -38.136dB

Marker 3 Freq 390.95MHz Atten -23.158dB

Marker 4 Freq 471.72MHz Atten -0.342dB

Marker 5 Freq 1.202GHz Atten -0.113dB

Marker 6 Freq 1.451GHz Atten -25.384dB

Marker 7 Freq 1.803GHz Atten -61.998dB