



## Circulator, Stripline Drop-In, 430-860 MHz, Split Bands (20 MHz Bandwidth), 1 kilo Watt

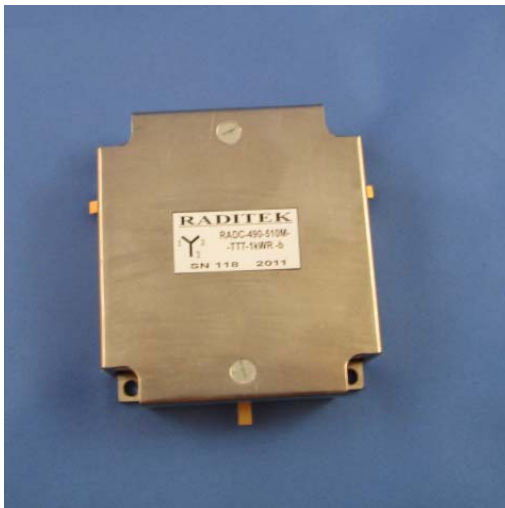

Units: mm  
Not to scale

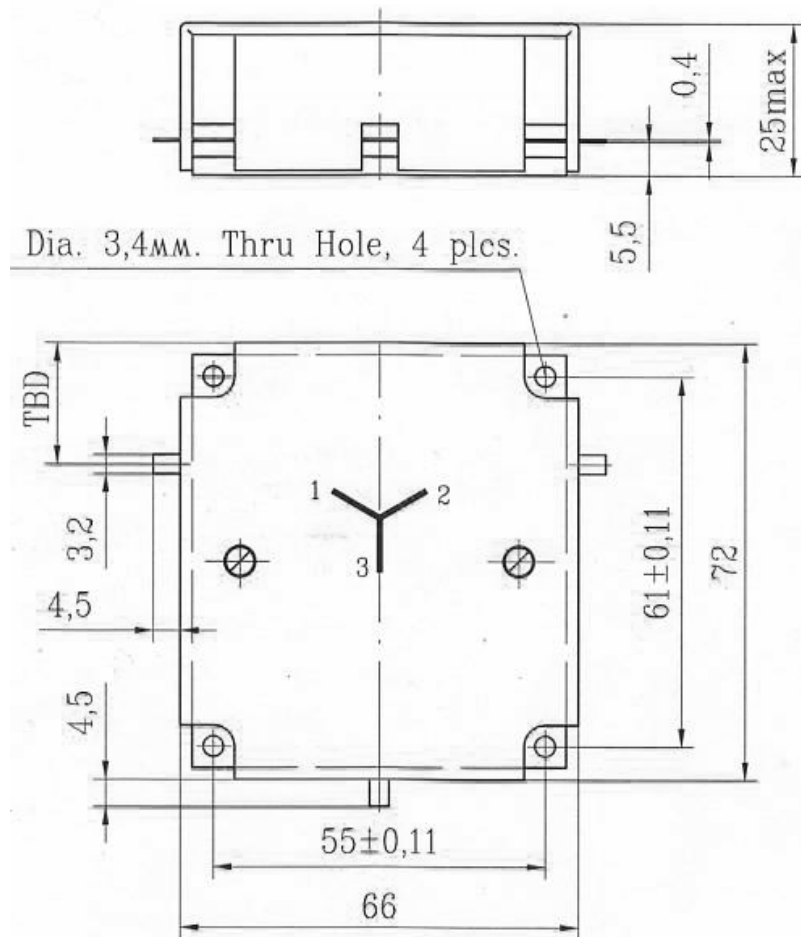

Direction of RF:	
R	Default
L	

Order Examples: RADC-430-450M-TTT-1kWR-b  
C=CIRCULATOR

### Specifications:

Frequency BW=20MHz	Insertion loss dB (max)	Isolation Port 2-1 dB (min)	Isolation Port 1-3 dB (min)	VSWR	RF Power kilo Watts	OperatingTemp At Heat Sink Base Plate °C
430-450	0.5	20	25	1.3:1	1	+5 to +50
490-510	0.4	21		1.2:1	1	0 to +50
570-590	0.4	20	25	1.3:1	1	+5 to +50
430-860	0.4	20	25	1.25:1	1	+5 to +50

RADC-430-860-TTT-1kWR-b

Specifications may be subject to change

09/27/11

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com