

RADITEK INC.


Ceramic Band Pass Filter 1240-1260MHz, 3 Watts, Surface Mount RBPF-1240-1260M-3W-S

code-k

1. ELECTRICAL SPECIFICATION.

Center Frequency (Fo)		1250 MHz	
Band Width (B.W)		1240 MHz	1260 MHz
NO	CHARACTERISTIC	TYP	SPEC
1	INSERTION LOSS(dB)	2.5 dB max.	3.0 dB max.
2	RIPPLE in BW(dB)	0.8 dB max.	1.0 dB max.
3	Return Loss in BW	16.0 dB min.	15.0 dB min.
4	IN/OUT IMPEDANCE	50 Ω	
5	ATTENUATION (Absolute Value)	40 dB min. AT Fo -70 MHz	
		30 dB min. AT Fo +70 MHz	
		SPEC+DIM	
6	In/Out Power	3 W MAX	

2. DIMENSION

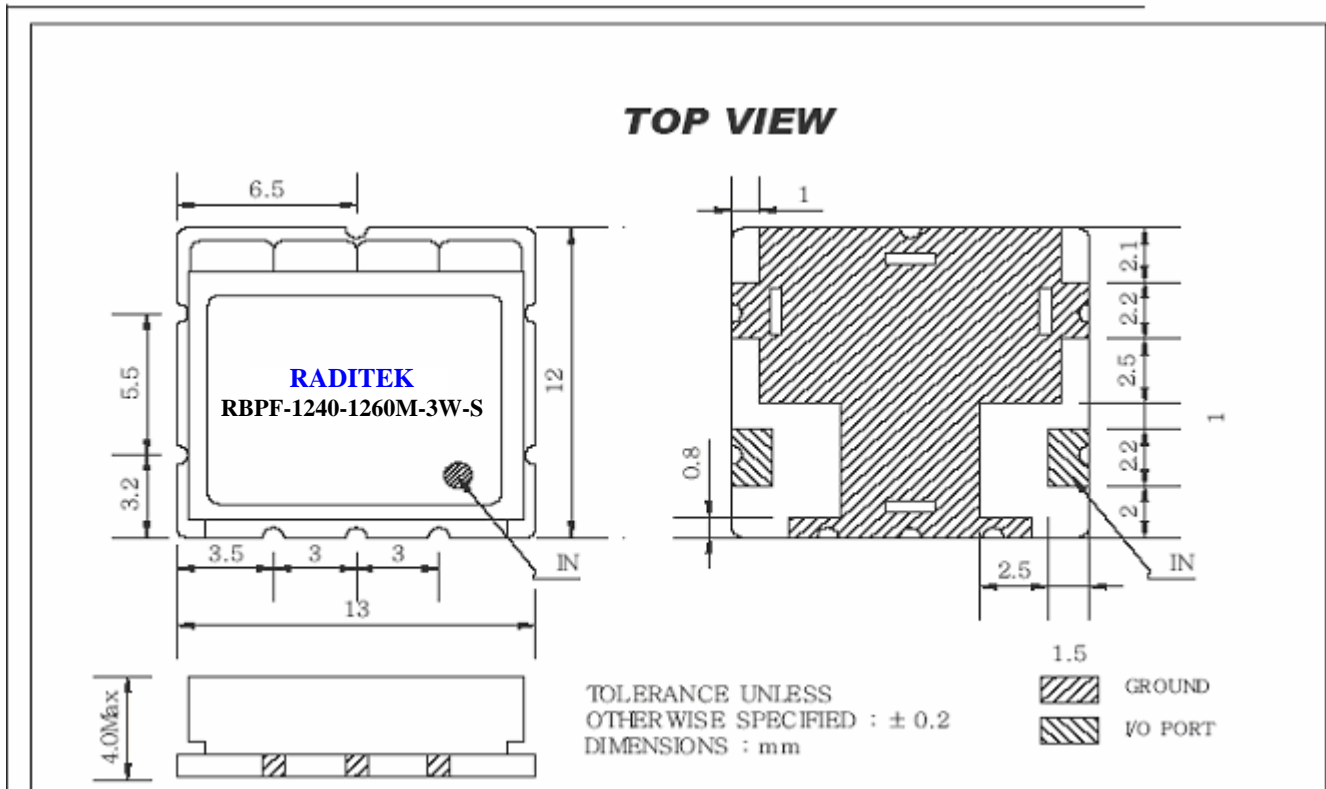

RBPF-1240-1260M-3W-S-k

Specifications may be subject to change

03/28/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com