


Coaxial Circulator, 141-143MHz 7/16 Connector RADC-141-143M-7/16-800WR(1kW Peak)-b

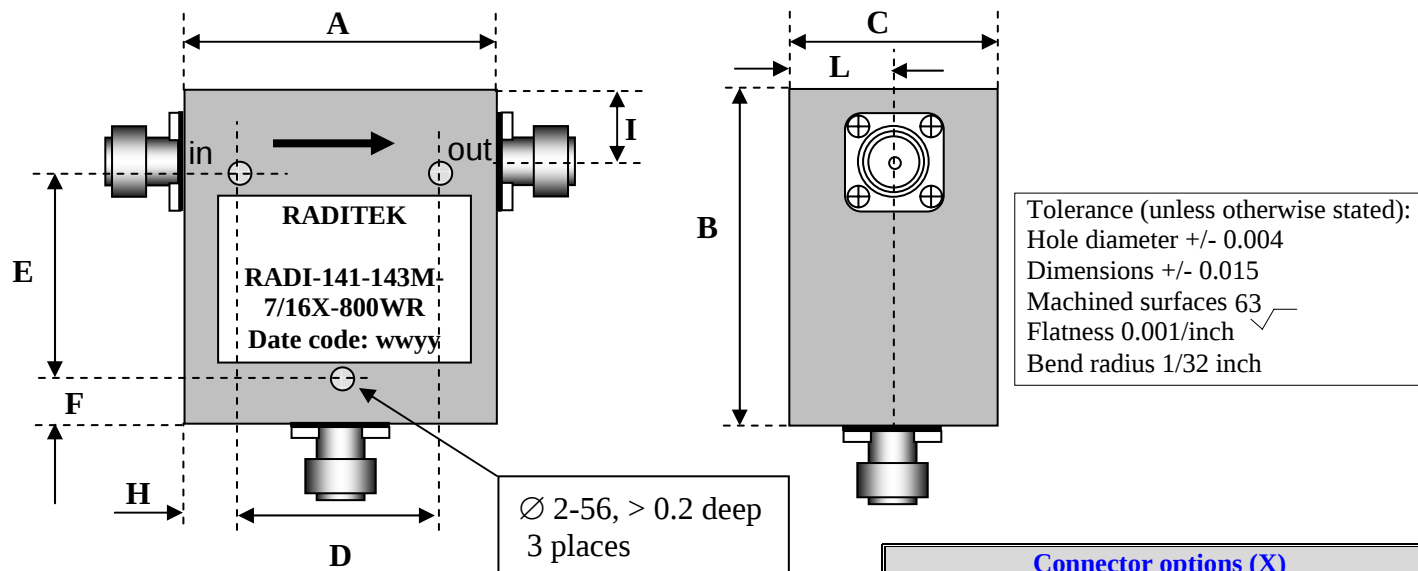

Direction of RF:	
R	Default →
L	←

Units: mm
Not to Scale

Order Examples: RAD**C**-F1-F2M-7/16-800**R**
I=ISOLATOR / C=CIRCULATOR


Connector options (X)				
Isolator		Circulator		
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	110	110	30	tba	tba	tba	tba	tba	tba	mm
										mm


Size#	Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op.Temp °C	Connector
1	141-143	Full	0.3	20	1.22	800 1kW Peak	800 1kW Peak	tbc	7/16

Coaxial Circulator, 141-143MHz 7/16 Connector RADC-141-143M-7/16-800WR(1kW Peak)-b

B4 Connector Option

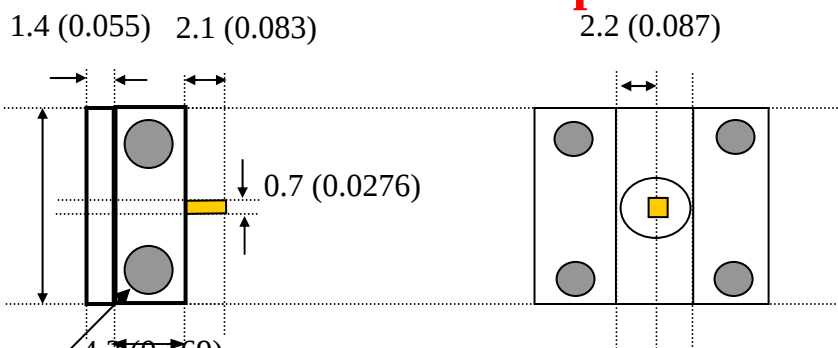

Screw down holes for grounding

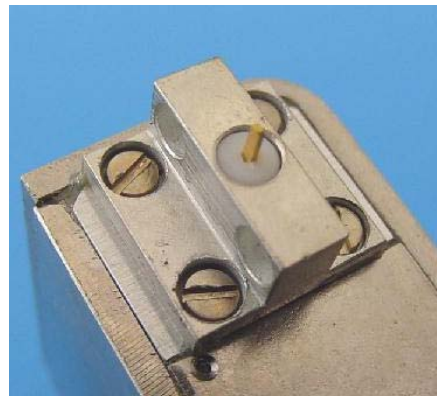

Alternative connector option (B4), so unit can be used as a "drop in." Note the screw down holes must clamp the grounding surfaces together.