


Coaxial Isolator or Circulator, 3.4-7.5GHz, Split Bands

SMA Connector, 2 or 10 Watts

RADI-f1-f2-S3-10WR

RADC-f1-f2-S23-10WR

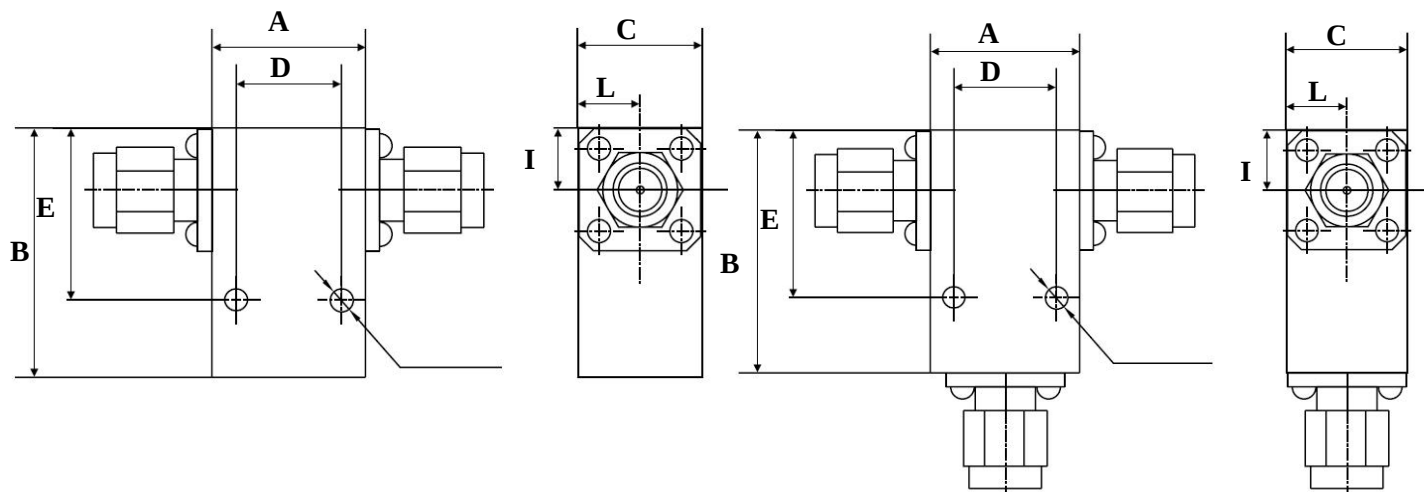

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADI-3.4-3.6-S3-10WR

I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	I	L	
16.0	26.0	15.0	11.0	16.0	6.0	7.5	mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
3.4-3.6	0.4	25	1.20	10	10	-40 to +70	SMA
3.4-4.2	0.5	20	1.25	10	10	-20 to +70	SMA
3.4-4.2	0.5	20	1.25	10	10	-20 to +70	SMA
5.3-7.5	0.5	20	1.25	2,10	2,10	-30 to +70	SMA