



**Coaxial Circulator, 5.68-5.80GHz  
SMA Connector, 2 Watts, (200 Watts Peak)  
RADC-5.68-5.80-S23-2WR(200W Peak)**

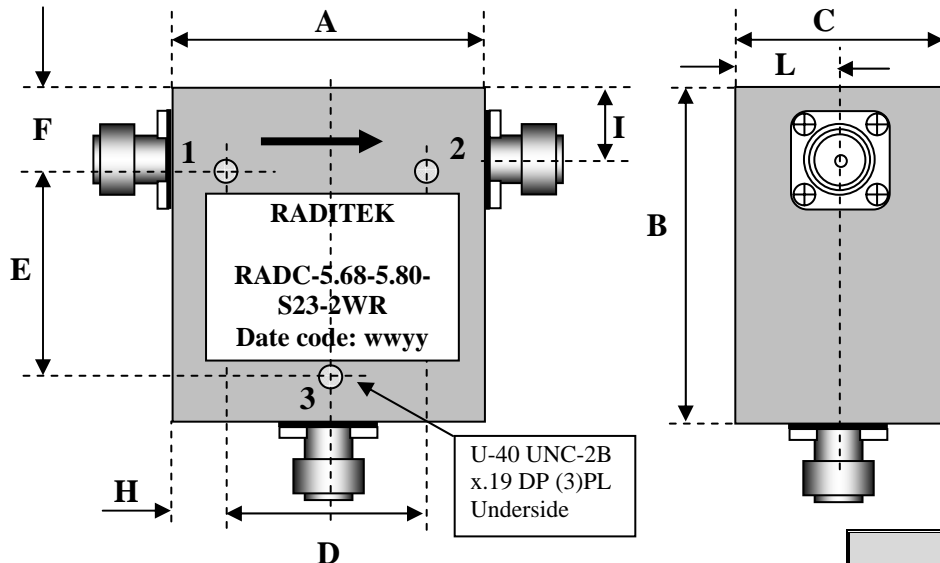

**Tolerance (unless otherwise stated):**

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

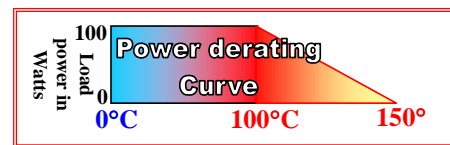

**Direction of RF:**

<b>R</b>	Default	
<b>L</b>		

Units: mm  
Not to scale

Order Examples: **RADC-5.68-5.80-S23-2WR**  
**I=ISOLATOR / C=CIRCULATOR**

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	F	H	I	L	
28.6	33.2	16.5	21.0	20.8	tba	tba	tba	tba	mm
									mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Power Peak Watts	Op. Temp °C	Connector
5.68-5.80	0.4	20	1.20	2	2	200	-60 to +85	