


RADITEK INC.


Dielectric Band Pass Filter 2670-2690MHz, Model 1106, Surface Mount RBPF-2670-2690M-1106-S-ca

code-j2

TOP VIEW

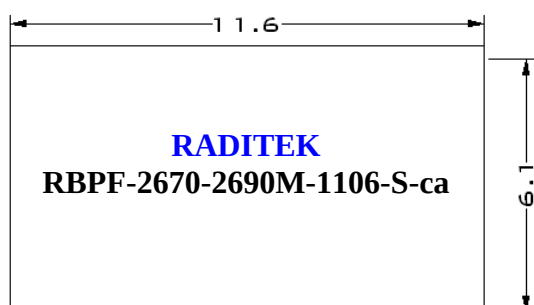

BOTTOM VIEW

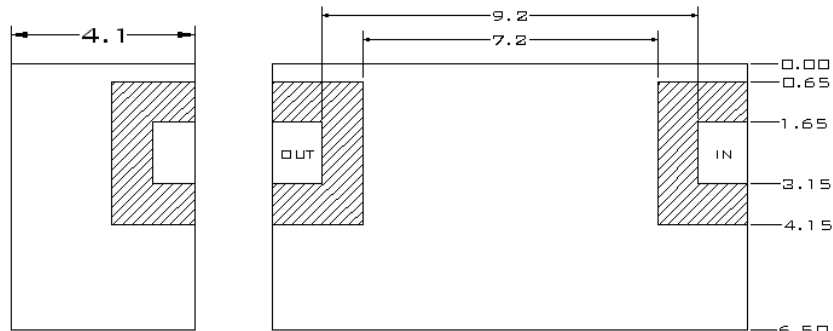

TOLERANCE : ± 0.2
UNIT: mm

ELECTRICAL SPECIFICATIONS			
ITEM		SPEC	Unit
1	Center Frequency [fo]	2680.0	MHz
2	Bandwidth [BW]	$f_o \pm 10.0$ [2670 ~ 2690]	MHz
3	Insertion Loss in BW	2.3 max.	dB
4	Ripple in BW	0.3 max.	dB
5	Return loss in BW	17.0 min.	dB
6	In/Out Impedance	50 Ω	
7	Attenuation [Relative Value]	40.0 dB min. @ $f_o - 250$ [2430] MHz	
		40.0 dB min. @ $f_o + 250$ [2930] MHz	
8	Operation Temperature Range	-40°C to +85°C	

RADITEK INC.

Dielectric Band Pass Filter
2670-2690MHz, Model 1106, Surface Mount
RBPF-2670-2690M-1106-S-ca

code-j2

RECOMMENDED PC BOARD PATTERN

