RADITEK INC.

code-d

Double Junction Coaxial Circulator, 3.4-3.6GHz
SMA Connector, 10 Watts
RADCC-3.4-3.6-HE1-S23-10WR

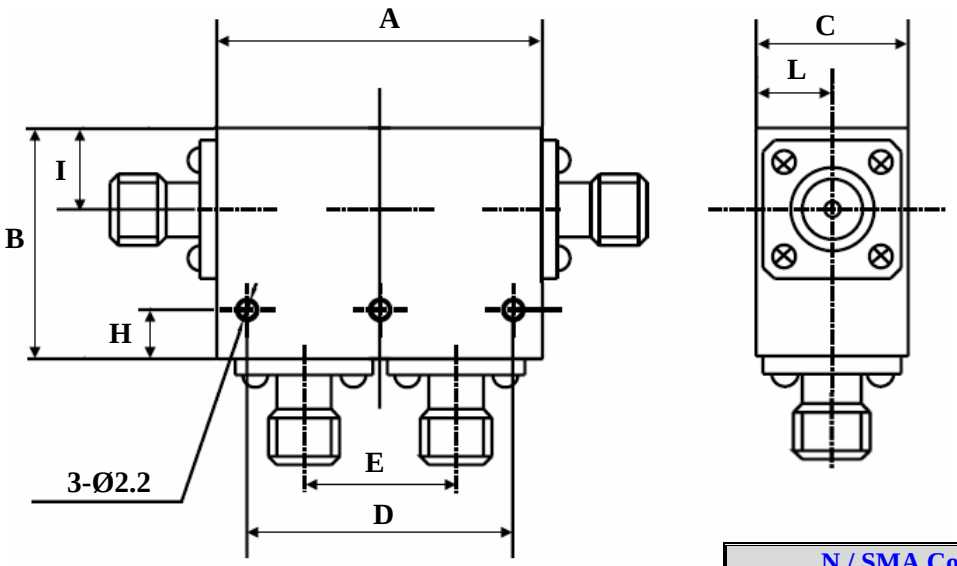

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADCC-3.4-3.6-HE1-S23-10WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	H	I	L	
50.0	**25.0**	**15.0**	45.0	25.0	7.0	7.5	7.5	mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
3.4-3.6	0.6	50	1.2	10	10	Tba	SMA

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Telephone: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com , E-mail: sales@raditek.com