


RADITEK INC.

SAW Band Pass Filter for EGSM-RX Band 851MHz-870MHz, 10 dBm Input Power, Surface Mount RSAW-BPF-851-870M-0303-10d-S-p2

code-p2

Frequency Characteristics: Transfer function

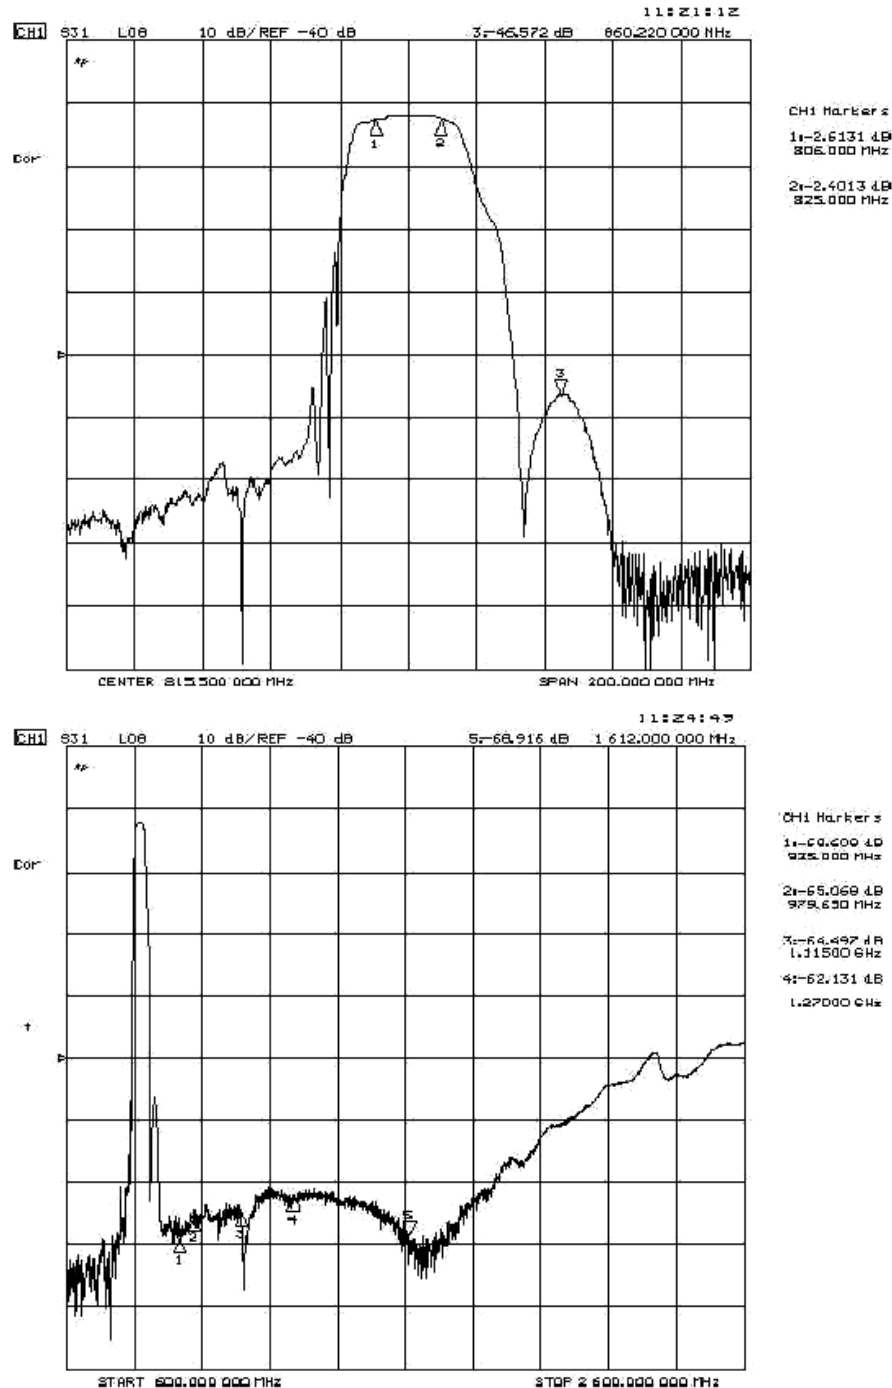

RSAW-BPF-851-870M-0303-10d-S-p2 Specifications may be subject to change

02/18/09

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483


WEB: www.raditek.com, E-mail: sales@raditek.com

RADITEK INC.


SAW Band Pass Filter for EGSM-RX Band 851MHz-870MHz, 10 dBm Input Power, Surface Mount RSAW-BPF-851-870M-0303-10d-S-p2

code-p2



S11 VSWR

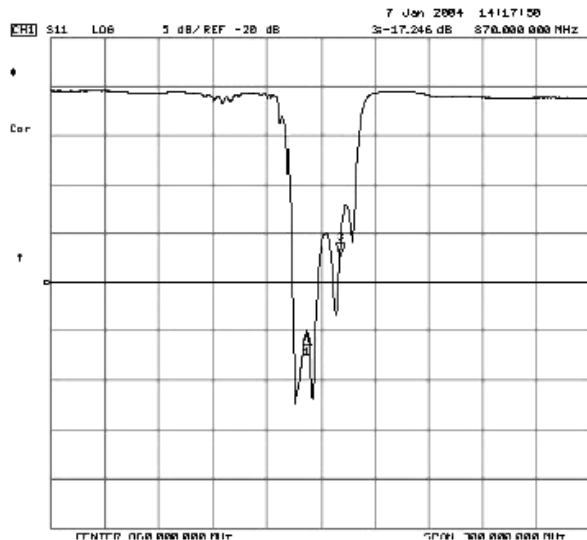

Reflections function

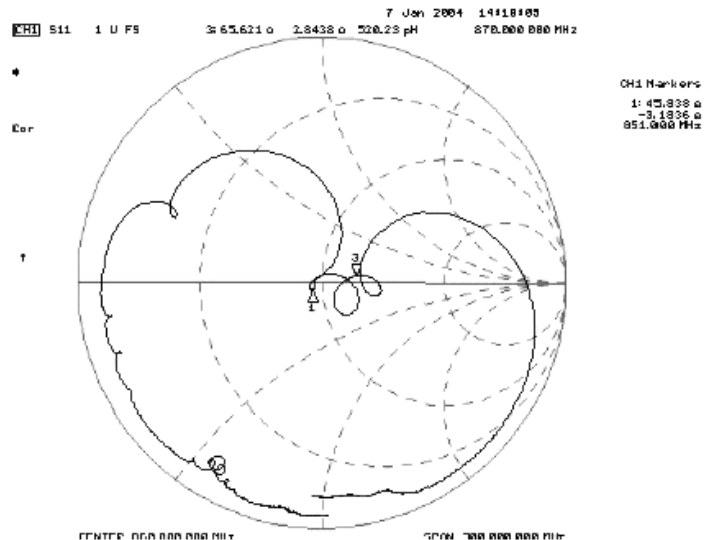

S22 VSWR

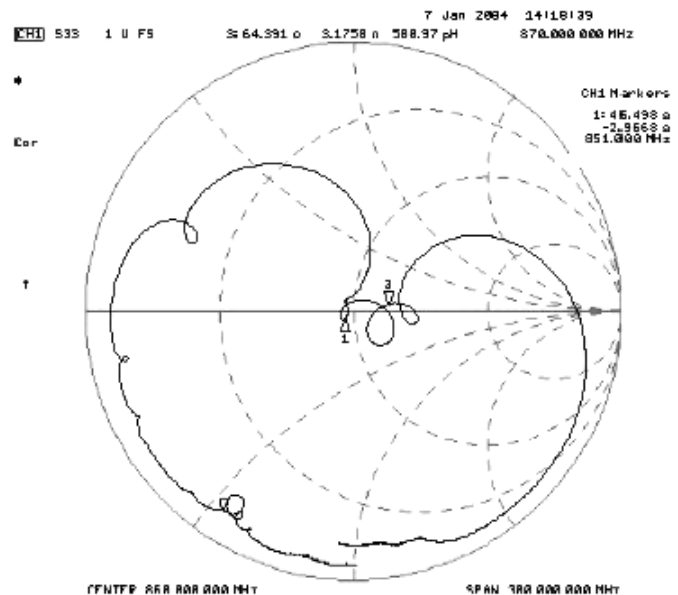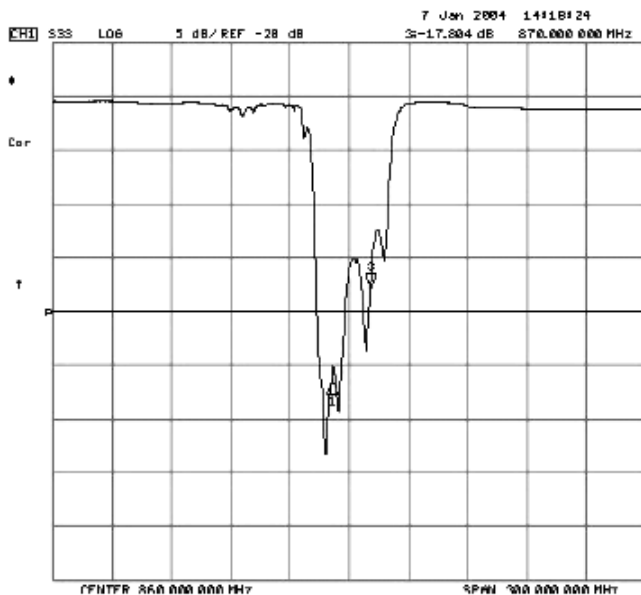


RADITEK INC.



SAW Band Pass Filter for EGSM-RX Band 851MHz-870MHz, 10 dBm Input Power, Surface Mount RSAW-BPF-851-870M-0303-10d-S-p2

code-p2

MEASUREMENT CIRCUIT

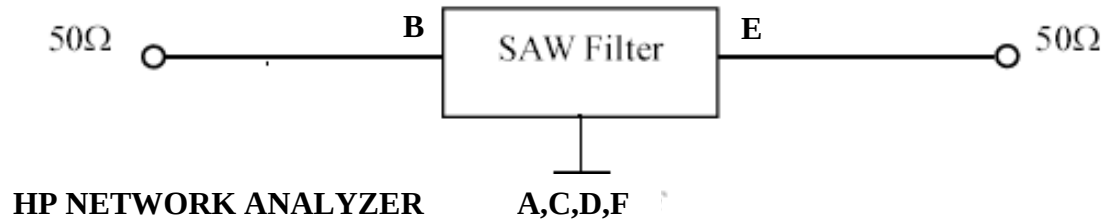

REEL DIMENSION

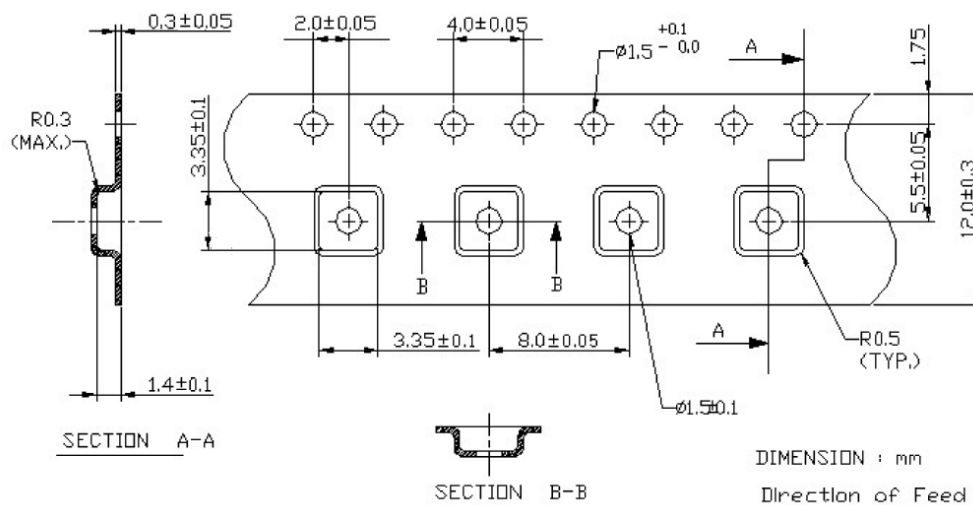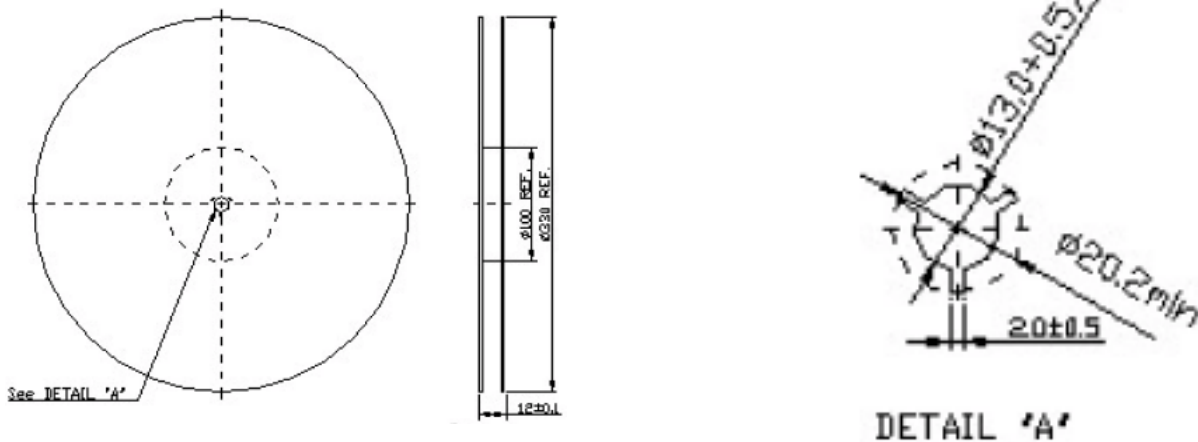

Note:

1. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

RSAW-BPF-851-870M-0303-10d-S-p2 Specifications may be subject to change

02/18/09

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com