
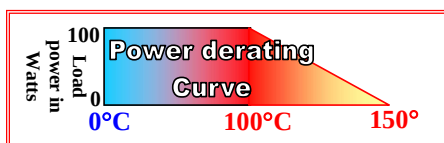


Coaxial Circulator or Isolator, 8.6-9.5GHz SMA Connector, 10 Watts, (50 Watts Peak) RADI-8.6-9.5-S3-10WR (50W Peak)

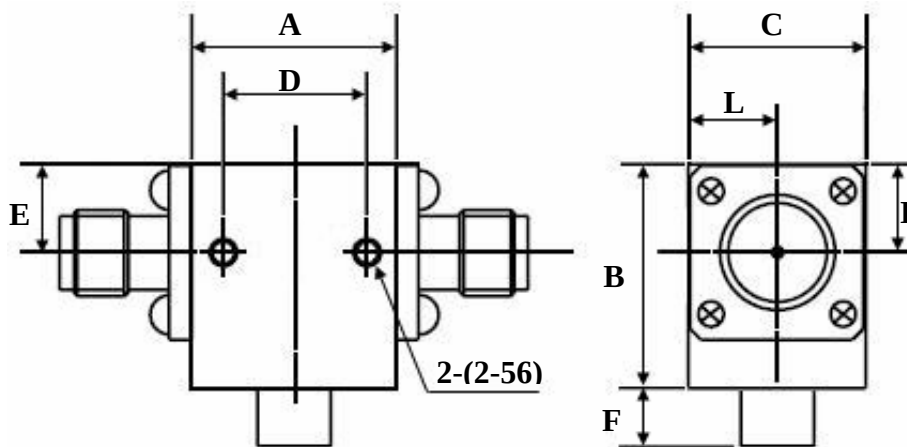

Connector Fitted here
on Circulator Models

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADI-8.6-9.5-S3-10WR(50W Peak)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	F	I	L	
12.7	15.9	12.7	8.0	6.35	3.81	6.35	6.35	mm
								mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Power Peak Watts	Op.Temp °C	Connector
8.6-9.5	0.4	20	1.25	10	10	50	-30 to +70	SMA