
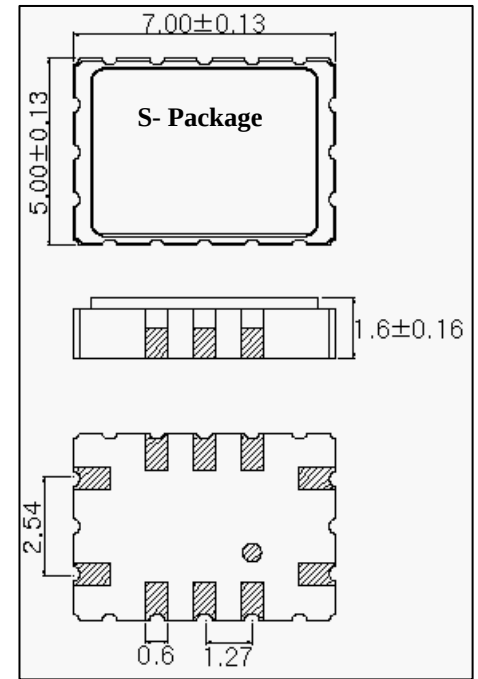
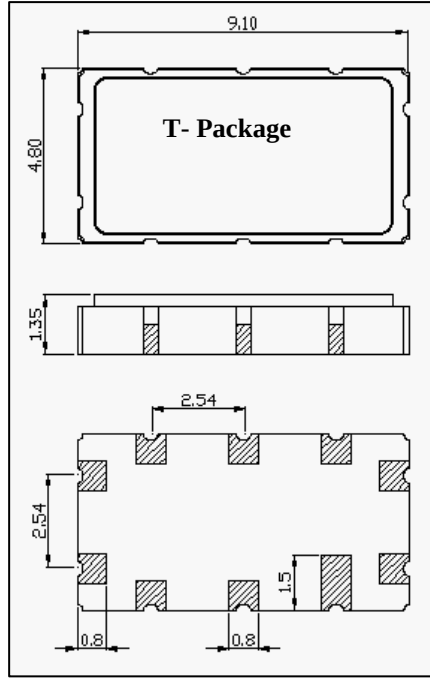


SAW Band Pass Filter IF-Mobile Phone-Surface Mount

code-k

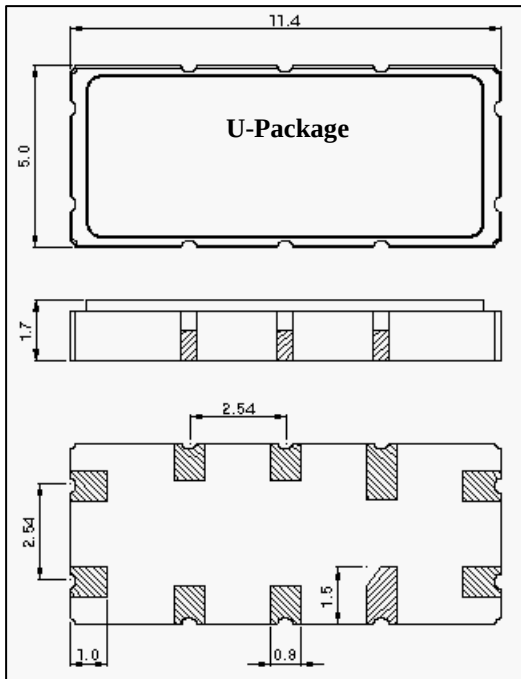

Units: mm Not to scale

Operation Temperature Range	-30 to +80°C
Storage Temperature Range	-40 to +85°C

ADDITIONAL PACKAGE STYLES ON Page 2

Order Examples: RSAW-BPF-84.75-86.01M-10mW-S-U-k

Description: (SAW Band Pass Filter, 84.75-86.01 MHz, 10 milliwatts, Surface Mount, U-Package)

Part Number	Center Frequency Fo[MHz]	3dB BW min. [MHz]	5dB BW min. [MHz]	33dB BW max. [MHz]	Insertion Loss max. [dB]	Pass band Ripple max. [dB]	Package	Application
RSAW-BPF-84.75-86.01M-10mW-S-U-k	85.38	-	1.26	1.80	12.5	1.2	U	CDMA
RSAW-BPF-84.75-86.01M-10mW-S-T-k	85.38	-	1.26	1.80	12.5	1.2	T	CDMA
RSAW-BPF-182.985-184.215M-10mW-S-S1-k	183.6	-	1.23	1.80	10.0	1.0	S1	CDMA
RSAW-BPF-187.7-192.3M-10mW-S-P3-k	190.0	4.6	-	-	7.0	2.0	P3	WCDMA
RSAW-BPF-209.75-211.01M-10mW-S-K-k	210.38	-	1.26	2.50	9.0	1.2	K	PCS
RSAW-BPF-219.75-221.01M-10mW-S-K-k	220.38	-	1.26	2.50	9.0	1.2	K	PCS
RSAW-BPF-245.5-246.5M-10mW-S-K-k	246.0	+/-0.5	-	-	2.5	0.4	K	SATELLITE
RSAW-BPF-245.95-246.05M-10mW-S-S-k	246.0	+/-0.05	-	-	6.5	2.0	S	SATELLITE
RSAW-BPF-359.85-360.15M-10mW-S-K-k	360.0	0.3	-	1.0(40dB)	5.2	1.5	K	GSM

RSAW-BPF-IF-Mobile Phone-SMT-k

Specifications may be subject to change

07/16/08

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com

