


SAW Band Pass Filter RF-Remote Control-Surface Mount

code-k

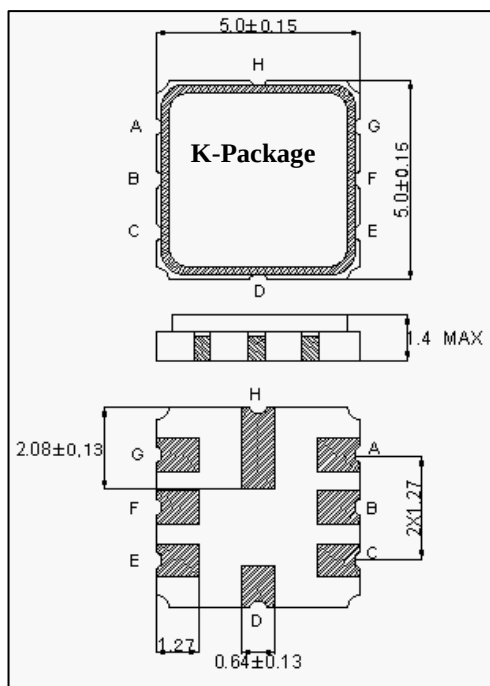

Operation Temperature Range	-30 to +80°C
Storage Temperature Range	-40 to +85°C

Units: mm
Not to scale

Order Examples: RSAW-BPF-314.8-315.2M-10mW-S-K-k

Description: (SAW Band Pass Filter 314.8-315.2MHz, 10 milliwatts, Surface Mount, K-Package)

Part Number	Center Frequency Fo [MHz]	Passband [MHz]	3dB BW [MHz]	Insertion Loss Typ[dB]	Passband Ripple Typ[dB]	Ultimate Rejection [dB]	Package
RSAW-BPF-314.8-315.2M-10mW-S-K-k	315.0	0.4	-	4.0	-	55	K
RSAW-BPF-433.76-434.08M-10mW-S-K-k	433.92	0.32	-	4.0	-	50	K
RSAW-BPF-434.26-434.58M-10mW-S-K-k	434.42	0.32	-	4.0	-	55	K