


RADITEK INC.

DCS Cavity Duplexer, 1710-1785MHz and 1805-1880MHz
SMA Connectors, 2 Watts

RCDIPL-1710-1785M/1805-1880M-S3-2W-k

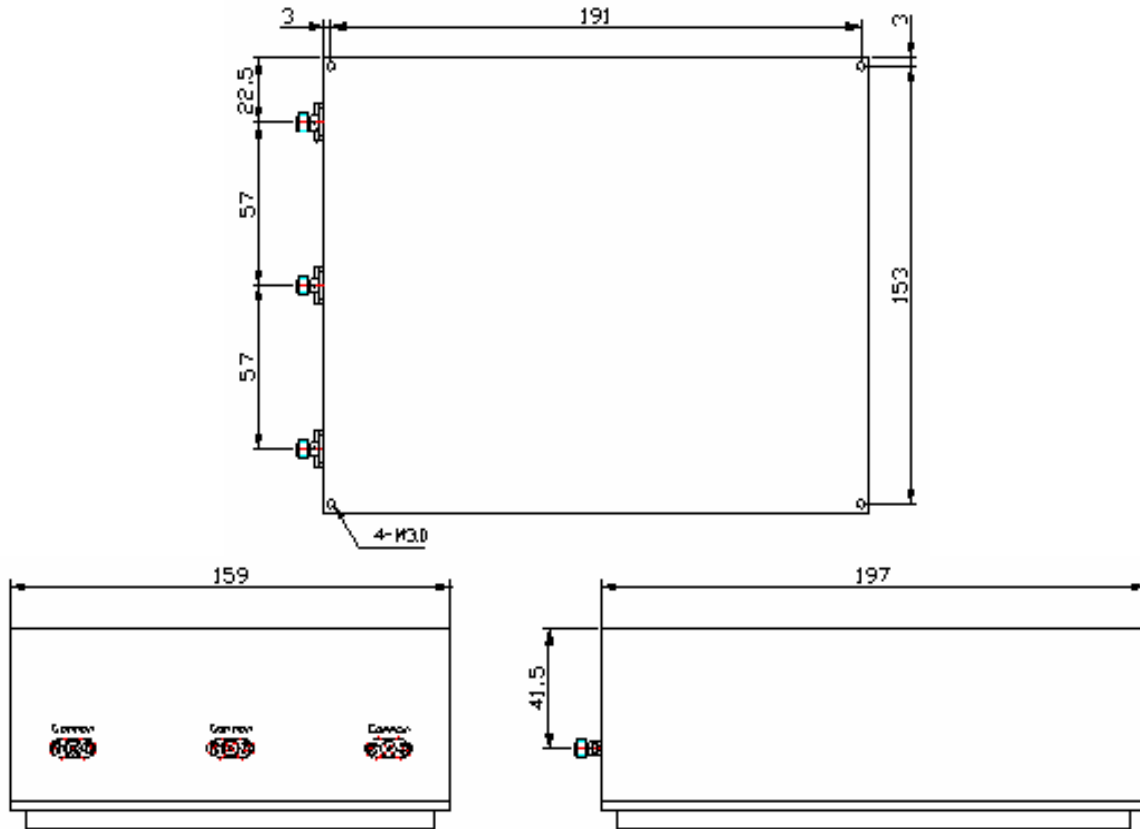

Parameter	Specification
Center Frequency	1747.5 MHz / 1842.5MHz
Band Width	65MHz / 75MHz
Insertion Loss	1.2dB Max
Ripple	0.4dB Max
VSWR	1.3 : 1
Other Band Attenuation	60dBc
Connector	SMA Female
Impedance	50 Ohm
Operating Temperature	-30 ~ 60°C