
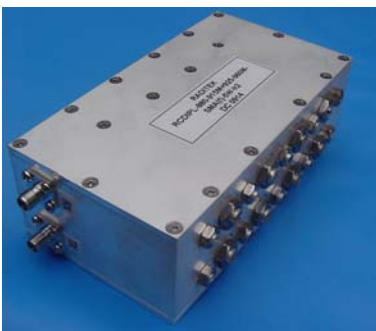


**ROHS Compliant**

# RADITEK INC.

**Cavity Diplexer, 880-915MHz RX / 925-960MHz TX**  
**SMA Female Connectors, 5 Watts Continuous**  
**RCDIPL-880-915M-925-960M-Sf-5W**

code-h2

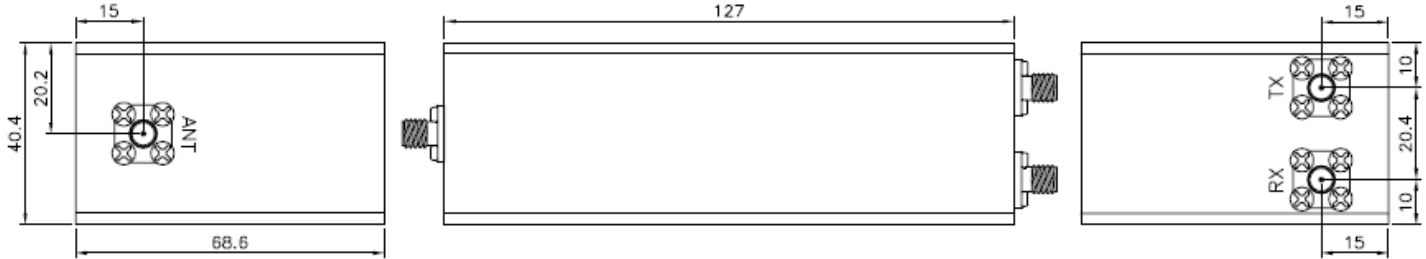

SPECIFICATIONS	RX	TX
Frequency Range	<b>880-915MHz</b>	<b>925-960MHz</b>
Insertion Loss	1.0 dB max.	1.0 dB max.
Return Loss	17.0 dB min	17.0 dB min
Isolation	30 dB min @ 925-960MHz.	30 dB min @ 880-915MHz.
Input Power (max)	5.0Watts continuous	
Port Impedance	50Ω	
Operation Temperature Range	10 to +60°C	
Connector (ANT/RX/TX)	SMA Female	
Size	40.4x127.0x68.6mm	
Finish	Silver Plate	