


Ceramic Duplexer

code-k

1170-1290 MHz / 1520-1610 MHz, Model 2611, 3 Watts, Surface Mount

RDUP-1170-1290M-1520-1610M-2611-3W-S-k

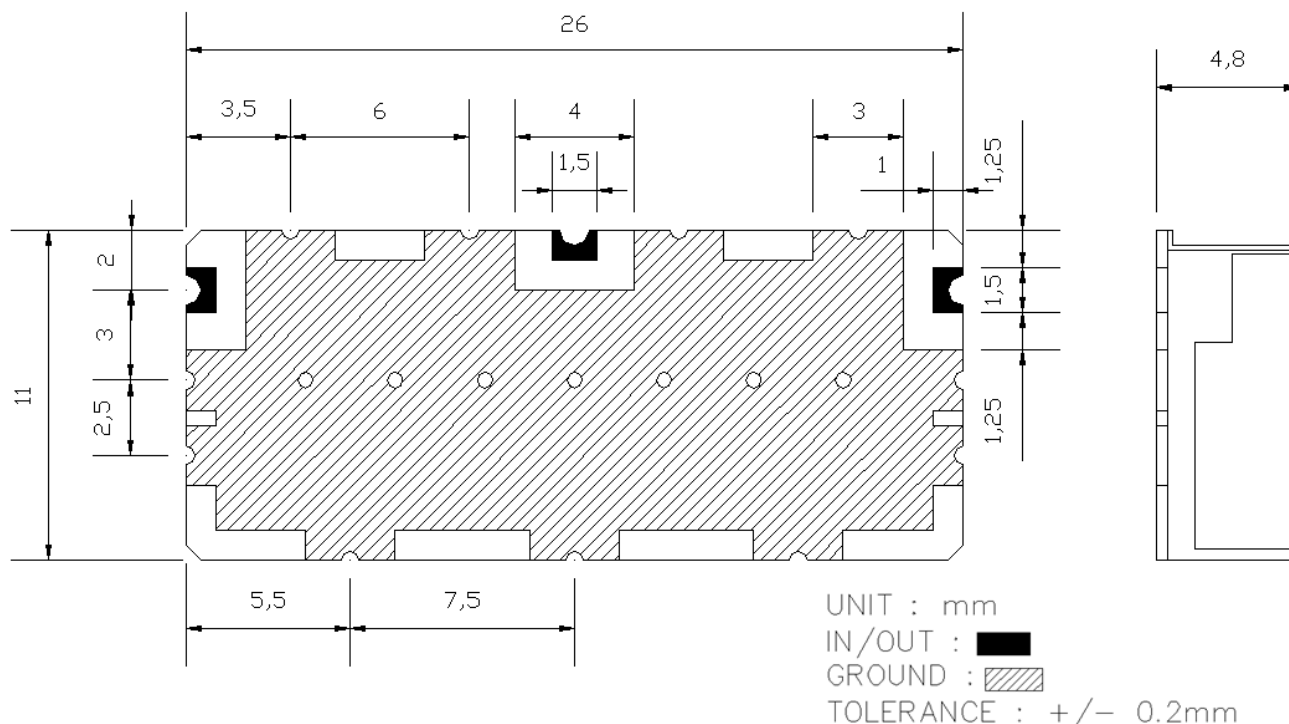

Order Examples: RDUP-1170-1290M-1520-1610M-2611-3W-S-k

Description: (Duplexer, 1170-1290MHz / 1520-1610MHz, Model 2611, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 1170-1290 MHz	RX 1520-1610 MHz
Center Frequency	1230 MHz	1565 MHz
Bandwidth	F0±60 MHz	F0±45 MHz
Pole	3	3
Insertion Loss	2.0 dB max	2.0 dB max
Ripple in BW	0.5 dB max	0.5 dB max
Return Loss	14dB min	14dB min
Attenuation	43 dB min. @ 900 MHz 14 dB min. @ 1400 MHz 25 dB min. @ 1520 MHz	40 dB min. @ 1290 MHz 25 dB min. @ 1400 MHz 25 dB min. @ 1800 MHz
Input Power (max)	3 Watts	
Operation Temperature Range	-20 to +85°C	