



Coaxial Circulator, 2.0-2.6GHz 7/16 Connector, 400 Watts RADC-2.0-2.6-7/16(f)-400WR

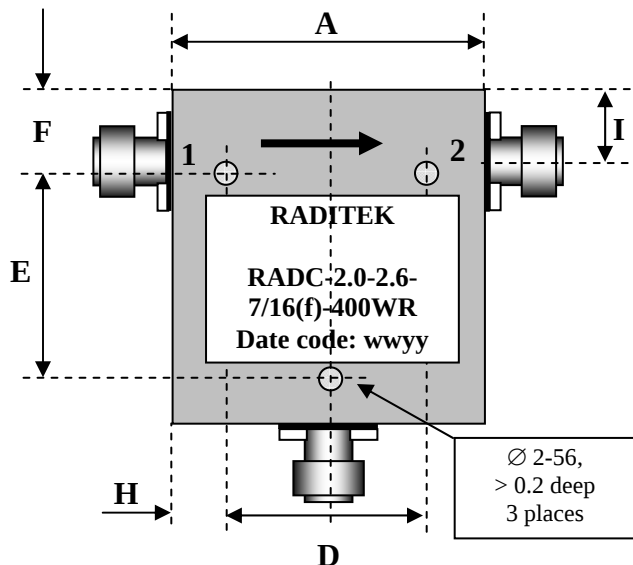

Tolerance (unless otherwise stated):

Hole diameter ± 0.004
Dimensions ± 0.015
Machined surfaces $63\sqrt{\text{ }}$
Flatness $\pm 0.001/\text{inch}$
Bend radius $1/32$ inch

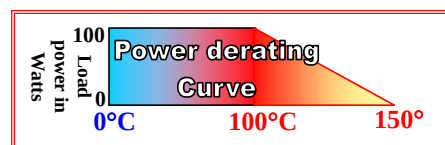

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADC-2.0-2.6-7/16(f)-400WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	90	90	30	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	2.0-2.6	0.4	20	1.25	400	400	-40 to 85	7/16

*Please specify liquid or forced air cooling at time of order
Note: Dimensions do not include the cooling system.