



Coaxial Circulator, 960-1215MHz N-Type Connector, 100 Watts, 2 kilowatt Pulse RADC-960-1215M-N23-100WR(2kW Pulse)

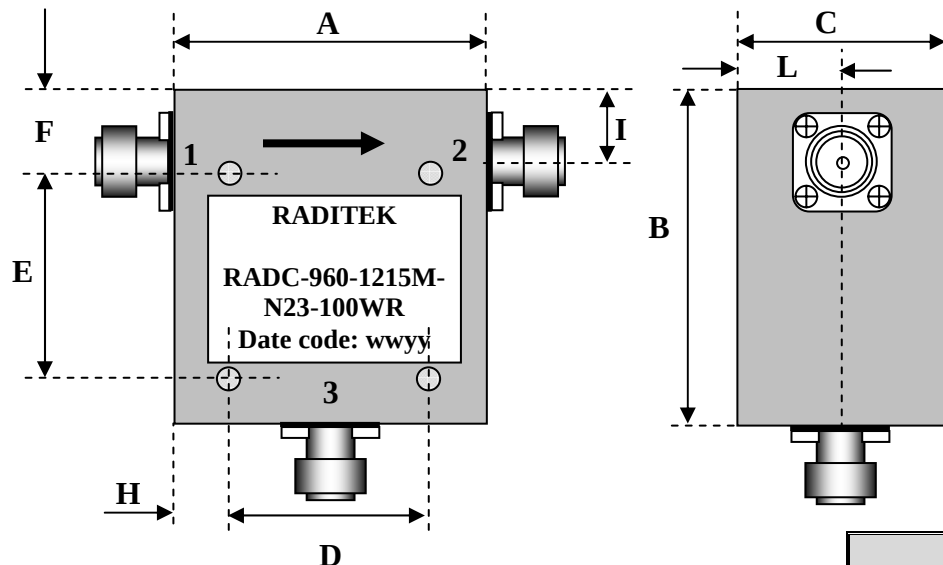

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

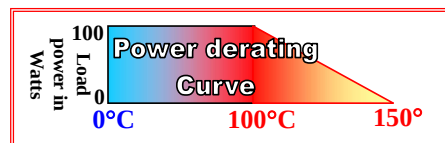

Direction of RF:		
R	Default	→
L		←

Units: mm
Not to scale

Order Examples: RAD**C**-960-1215M-N23-100WR(2kW Pulse)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	F	H	I	L	
75	75	28	tba	tba	tba	tba	tba	tba	mm
									mm

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Power Pulse kWatts	Op. Temp °C	Connector
960-1215	0.3	18	1.20	100	100	2	+10 to +45	N-Type

ROHS Compliant

RADITEK INC.

code-b

**Coaxial Circulator, 960-1215MHz
N-Type Connector, 100 Watts, 2 kilowatt Pulse
RADC-960-1215M-N23-100WR(2kW Pulse)**

RADC-960-1215M-N23-100WR(2kW Pulse)-b Specifications may be subject to change

07/27/07

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com

2 of 2