


Dielectric Duplexer

code-k

1525-1559MHz / 1626.5-1660.5MHz, Model 4319, 3-6 Watts, Surface Mount

RDUP-1525-1559M-1626.5-1660.5M-4319-3-6W-S-k

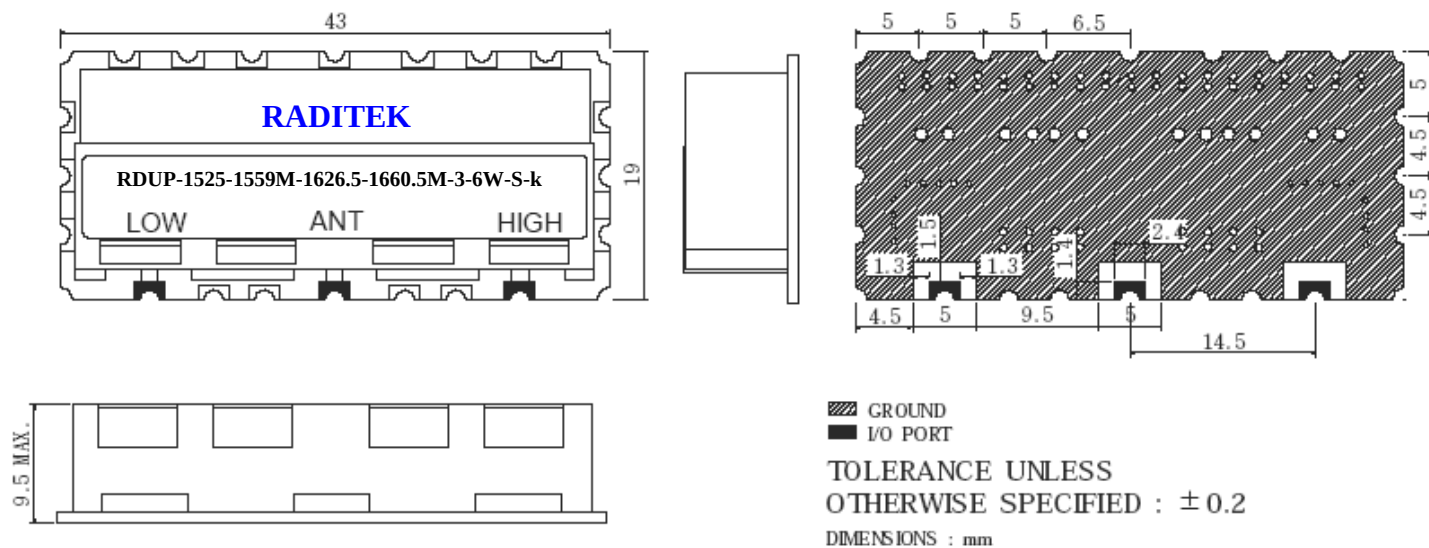

 **Order Examples:** RDUP-1525-1559M-1626.5-1660.5M-4319-3-6W-S-k

Description: (Duplexer, 1525-1559MHz / 1626.5-1660.5MHz, Model 4319, 3-6 Watts, Surface Mount)

Specifications DPX Band	TX 1525-1539 MHz	RX 1626.5-1660.5 MHz
Center Frequency	1542 MHz	1643.5 MHz
Bandwidth	34 MHz	34 MHz
Insertion Loss	1.0 dB max.(1.3 Spec)	1.2 dB max.(1.5 Spec)
Isolation (Absolute Value)	65.0 dB min.(at another band)	60.0 dB min.(at another band)
Ripple in BW	0.3 dB max. .(0.5 Spec)	0.3 dB max. .(0.5 Spec)
Return Loss	17.0 dB min. .(15.0 Spec)	17.0 dB min. .(15.0 Spec)
In/Out Impedance	50 Ω	
Input Power	3-6 Watts max	
Operation Temperature Range	-30 to +85°C	