


Ceramic Duplexer

code-k

1850-1910MHz / 1930-1990MHz, Model 2606, 3 Watts, Surface Mount

RDUP-1850-1910M-1930-1990M-2606-3W-S-k

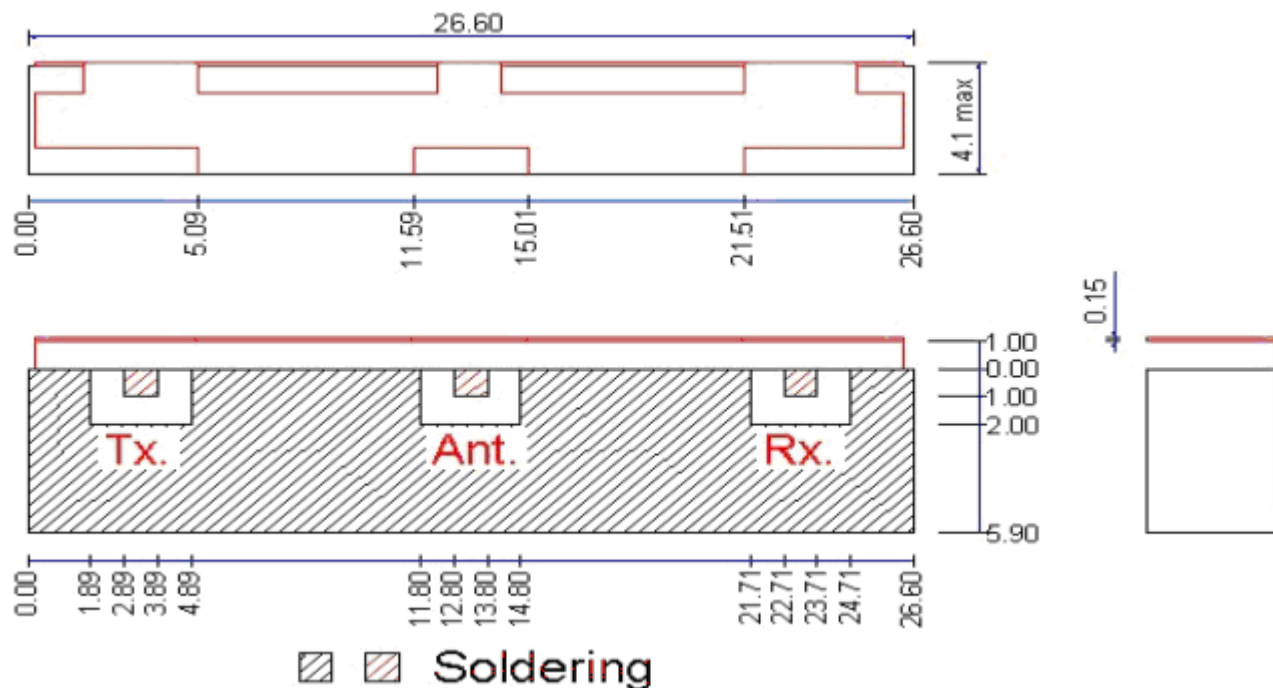

Order Examples: RDUP-1850-1910M-1930-1990M-2606-3W-S-k

Description: (Duplexer, 1850-1910MHz /1930-1990MHz, Model 2606, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 1850-1910MHz	RX 1930-1990MHz
Center Frequency	1880.0 MHz	1960.0 MHz
Bandwidth	Ft ± 30.0 [1850-1910MHz]	Fr ± 30.0 [1930-1990MHz]
Insertion Loss	4.0 dB max.	4.0 dB max.
Ripple in BW	3.0 dB max.	3.0 dB max.
VSWR	1.67:1 max	1.67:1 max
In/Out Impedance	50 Ω	
Attenuation [Absolute Value]	40 dB min. @ 1930-1990MHz	45 dB min. @ 1850-1910MHz
Input Power (max)	3.0 W max.	
Operation Temperature Range	-30 to +85°C	