


Ceramic Duplexer

code-k

1850-1910MHz / 1930-1990MHz, Model 4015, 3 Watts, Surface Mount

RDUP-1850-1910M-1930-1990M-4015-3W-S-k

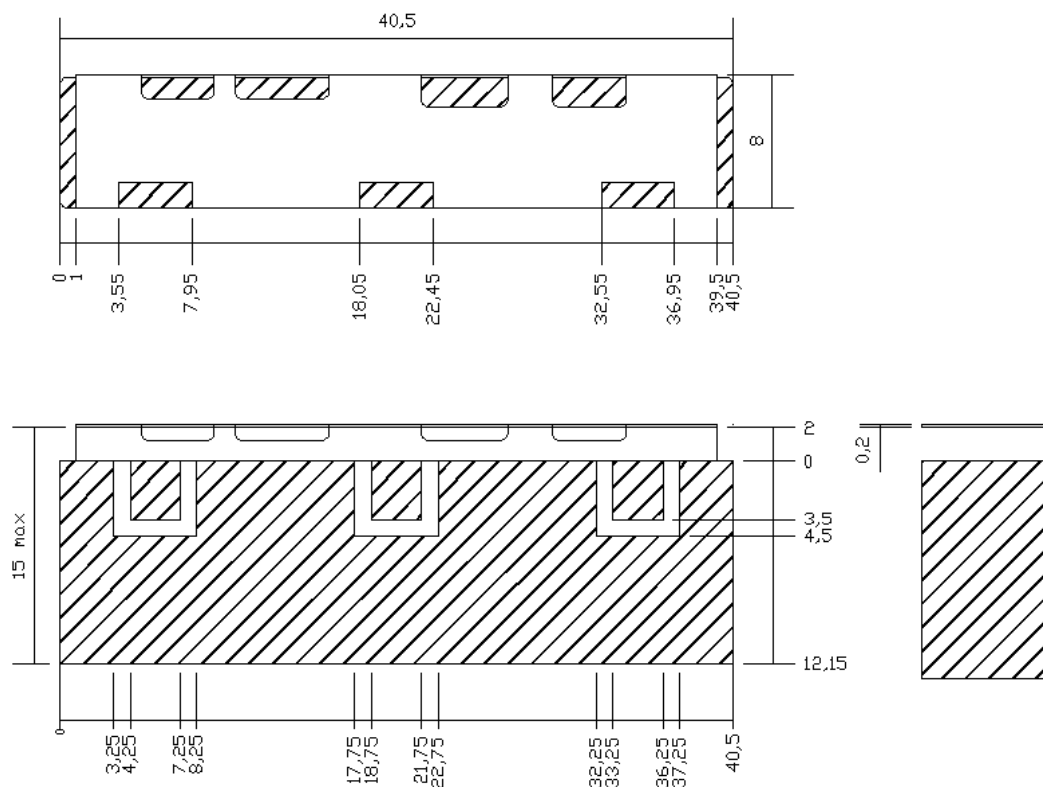

Order Examples: RDUP-1850-1910M-1930-1990M-4015-3W-S-k

Description: (Duplexer, 1850-1910MHz / 1930-1990MHz, Model 4015, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 1850-1910MHz	RX 1930-1990MHz
Center Frequency	1880 MHz	1960 MHz
Bandwidth	Fo±30 MHz	Fo±30 MHz
Insertion Loss	3.2 dB max.	2.5 dB max.
Ripple in BW	2.2 dB max.	1.0 dB max.
Return Loss	14.0 dB min	14.0 dB min
Attenuation	50 dB min @ 1930-1990MHz.	50 dB min @ 1850-1910MHz.
Input Power (max)	3 Watts	
In/Out Impedance	50Ω	
Operation Temperature Range	-25 to +85°C	