


Ceramic Duplexer

code-k

1940-1960 MHz / 2130-2150 MHz, Model 3008, 3 Watts, Surface Mount

RDUP-1940-1960M-2130-2150M-3008-3W-S-k

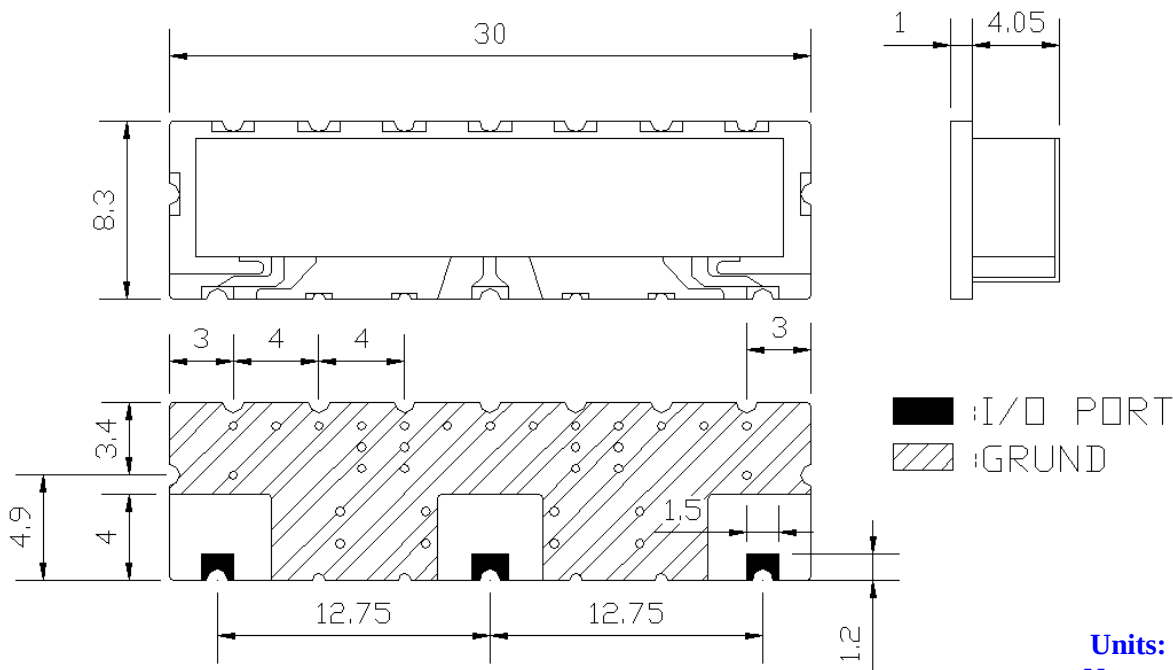

**Units: mm
Not to scale**

Order Examples: RDUP-1940-1960M-2130-2150M-3008-3W-S-k

Description: (Duplexer, 1940-1960MHz / 2130-2150MHz, Model 3008, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 1940-1960 MHz	RX 2130-2150 MHz
Center Frequency	1950 MHz	2140 MHz
Bandwidth	Fo $\pm$ 10 MHz	Fo $\pm$ 10 MHz
Pole	4	4
Insertion Loss	2.0 dB max.	2.0 dB max.
Ripple in BW	0.5 dB max.	0.5 dB max.
Return Loss	15 min	15 min
Attenuation	55 dB min. @ 2130~2150 MHz	55 dB min. @ 1940~1960MHz
Input Power (max)	3 Watts	
Operation Temperature Range	20 to +85°C	