


Ceramic Duplexer

code-k

100-400MHz / 700-3000MHz, Model 4417, 1 Watt, Surface Mount

RDUP-100-400M-700-3000M-4417-1W-S-k

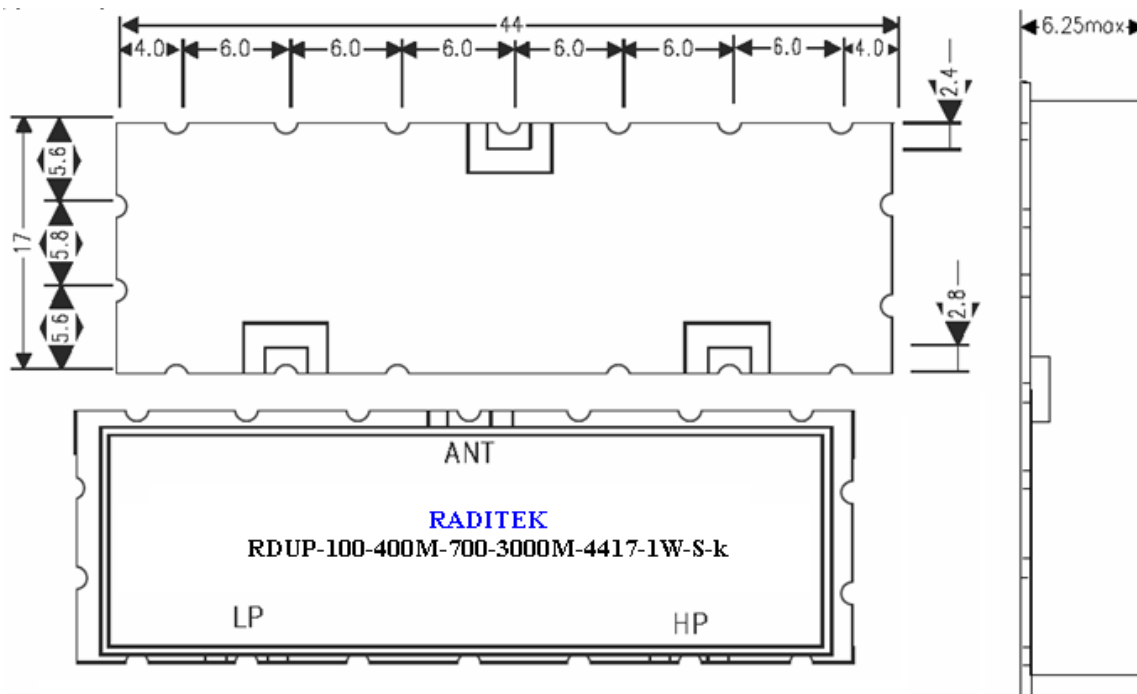

Order Examples: RDUP-100-400M-700-3000M-4417-1W-S-k

Description: (Duplexer, 100-400MHz /700-3000MHz, Model 4417, 1 Watts, Surface Mount)

SPECIFICATIONS	TX 100-400MHz	RX 700-3000MHz
Center Frequency	400 MHz	700 MHz
Bandwidth	Low Pass (100~400MHz)	20MHz (700-3000MHz)
Insertion Loss	3.0 dB max.	5.0 dB max.
V.S.W.R	1.5:1	1.5:1
Attenuation	60 dB min. @ 700-3000MHz	60 dB min. @ 100-400MHz
In/Out Impedance	50	
Power Rating	1W	