


Ceramic Duplexer

code-k

452.5-457.2MHz / 462.5-467.5MHz, Model 6935, 5 Watts, Surface Mount

RDUP-452.5-457.5M-462.5-467.5M-6935-5W-S-k

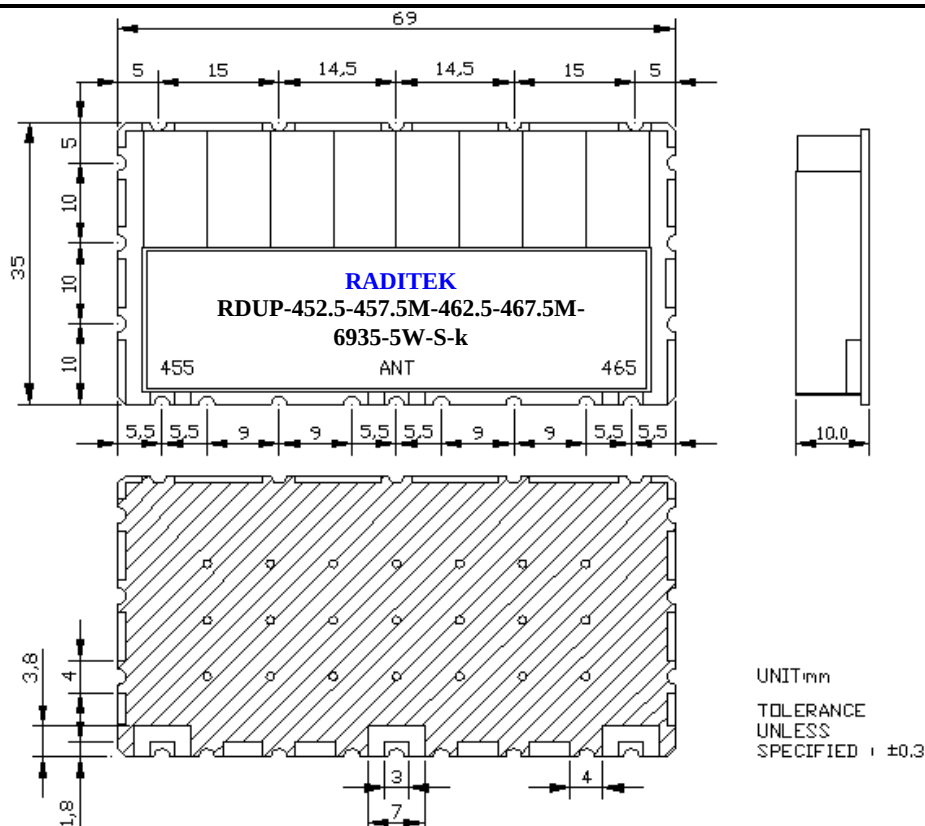

Order Examples: RDUP-452.5-457.5M-462.5-467.5M-6935-5W-S-k

Description: (Duplexer, 452.5-457.5MHz / 462.5-467.5MHz, Model 6935, 5 Watts, Surface Mount)

SPECIFICATIONS	TX 452.5-457.5MHz	RX 462.5-467.5MHz
Center Frequency [fo]	455 MHz	465 MHz
Bandwidth [BW]	5 MHz	5 MHz
Insertion Loss	3.2 dB max.	3.2 dB max.
Ripple	1.5 dB max.	1.5 dB max.
Return Loss	15 dB min	15 dB min
Input Power	5.0 W max.	
In/Out Impedence	50Ω	
Attenuation	40dB min. @ 462.5-467.5MHz	40dB min. 452.5-457.5MHz
Operation Temperature Range	-20 to +85°C	