


Ceramic Duplexer

code-k

824-849MHz / 869-894MHz, Model 4015, 3 Watts, Surface Mount

RDUP-824-849M-869-894M-4015-3W-S-k

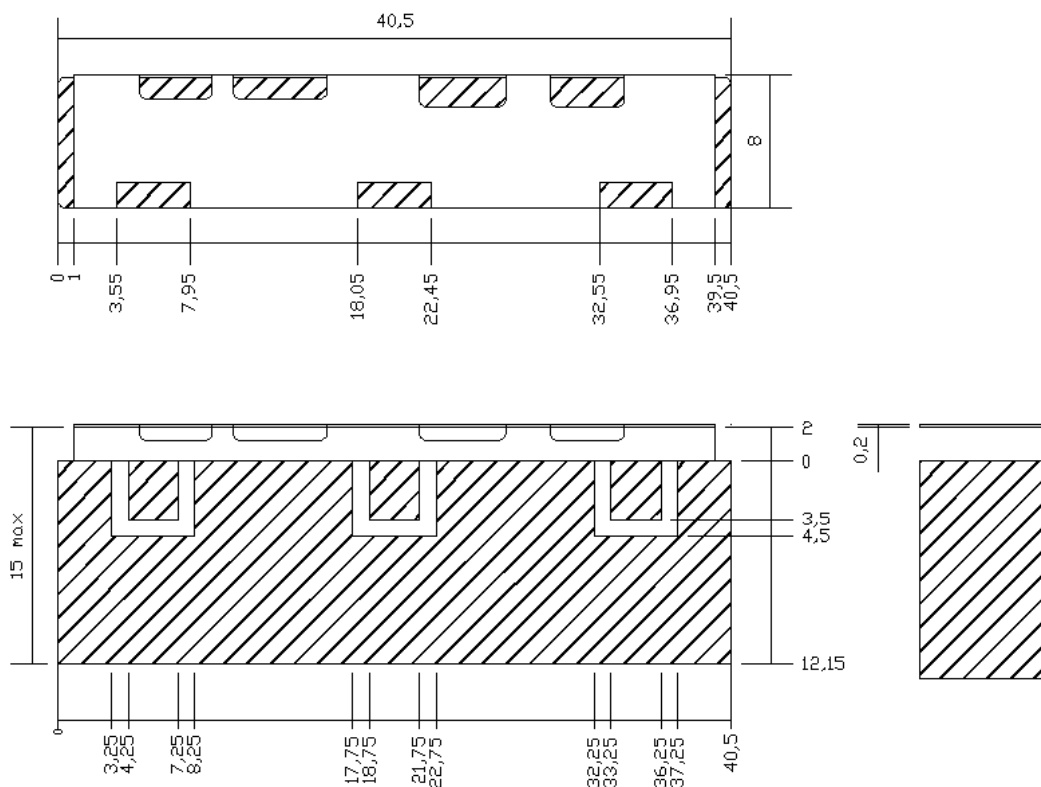

Order Examples: RDUP-824-849M-869-894M-4015-3W-S-k

Description: (Duplexer, 824-849MHz / 869-894MHz, Model 4015, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 824-849MHz	RX 869-894MHz
Center Frequency	836.5 MHz	881.5 MHz
Bandwidth	Fo±12.5 MHz	Fo±12.5 MHz
Insertion Loss	2.5 dB max.	2.5 dB max.
Ripple in BW	1.0 dB max.	1.0 dB max.
Return Loss	14.0 dB min	14.0 dB min
Attenuation	45 dB min @ 869-894MHz.	45 dB min @ 824-849MHz.
Input Power (max)	3 Watts	
In/Out Impedance	50Ω	
Operation Temperature Range	-25 to +85°C	