


Ceramic Duplexer

code-k

890-915MHz /935-960MHz, Model 2707, 3 Watts, Surface Mount

RDUP-890-915M-935-960M-2707-3W-S-k

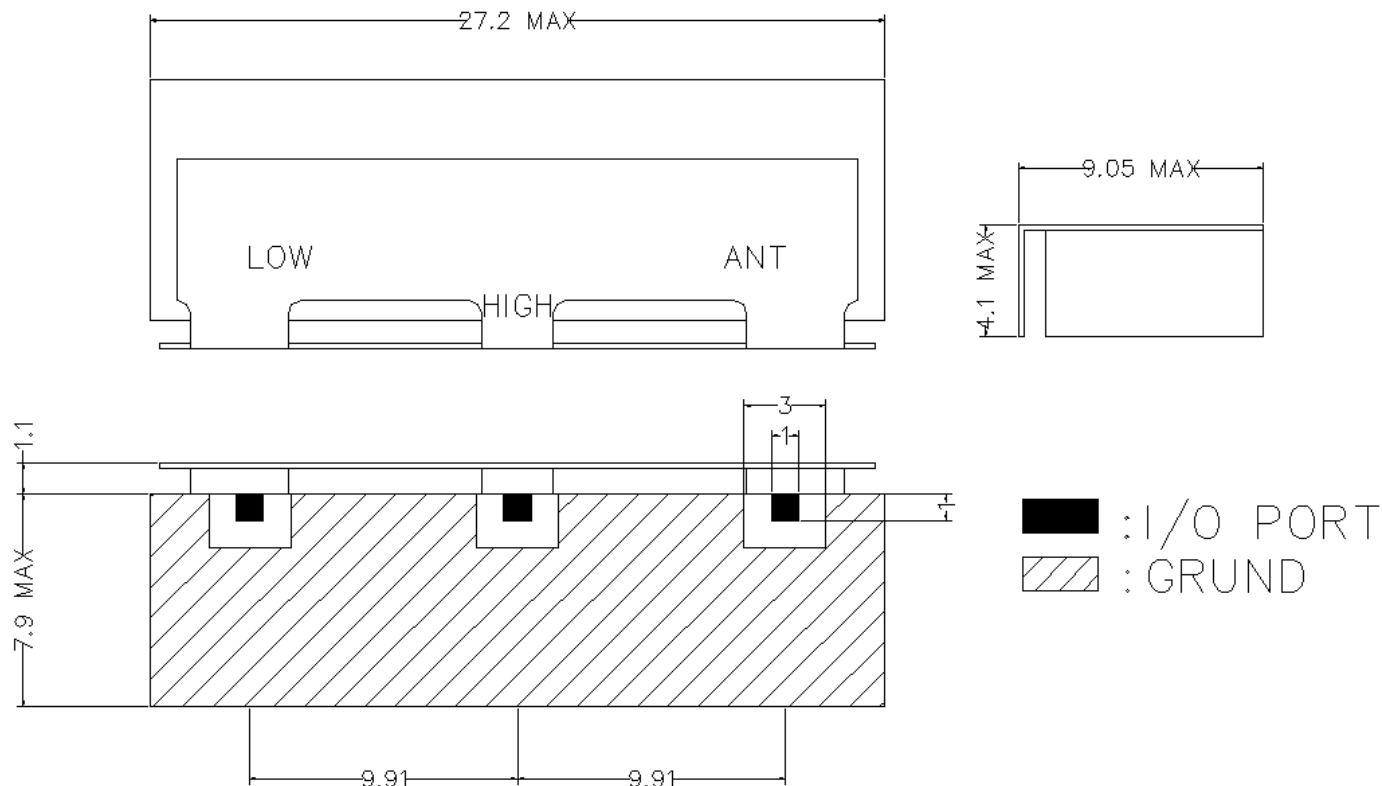

Order Examples: RDUP-890-915M-935-960M-2707-3W-S-k

Description: (Duplexer, 890-915MHz / 935-960MHz, Model 2707, 3 Watts, Surface Mount)

SPECIFICATIONS	TX 890-915MHz	RX 935-960MHz
Center Frequency	902.5 MHz	947 MHz
Bandwidth	Fo ±12.5 MHz	Fo ±12.5 MHz
Insertion Loss	3.0 dB max.	3.0 dB max.
Ripple in BW	1.8 dB max.	1.8 dB max.
Return Loss	14 dB min	14 dB min
Attenuation	45 dB min. @ 935-960MHz	40 dB min. @ 890-915MHz
Input Power	3W max.	
In/Out Impedance	50Ω	
Operation Temperature Range	-20 to +85°C	