


RADITEK INC.

Ceramic Duplexer

code-j

890-915MHz / 935-960MHz, Model 4320, 3 Watts, Surface Mount

RDUP-890-915M-935-960M-4320-3W-S-ce-j

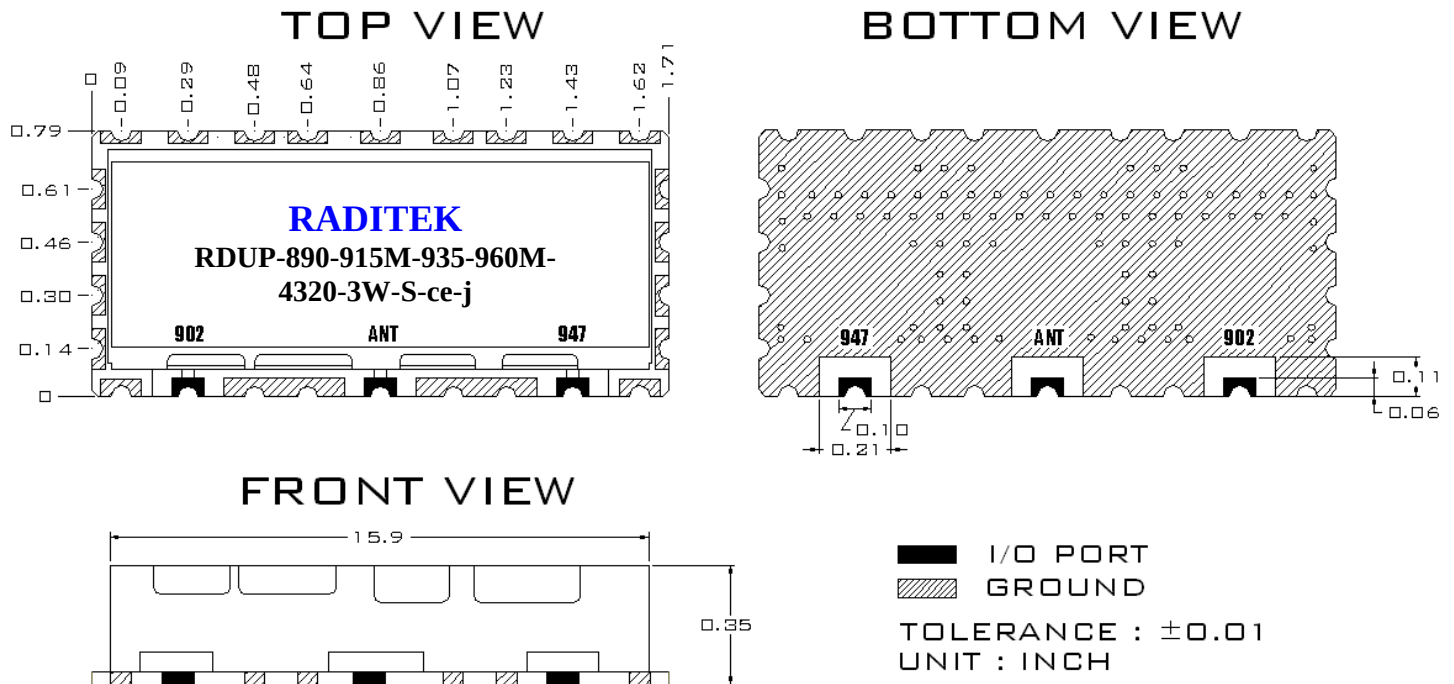

SPECIFICATIONS	TX 890-915 MHz	RX 935-960 MHz
Center Frequency [fo]	902.5 MHz	947.5 MHz
Bandwidth [BW]	$fo \pm 12.5$ [890~915] MHz	$fo \pm 12.5$ [935~960] MHz
Insertion Loss at fo	3.0 dB max.	3.0 dB max.
Ripple in BW	1.5 dB max.	1.5 dB max.
Return Loss in BW	15.0 dB min.	15.0 dB min.
Input Power	3.0 W max.	
Attenuation [Absolute Value]	60 dB min. @ 935 ~ 960 MHz	60 dB min. @ 890 ~ 915 MHz
In/Out Impedance	50 Ω	
Operation Temperature Range	-40 to +85 C	

RDUP-890-915M-935-960M-4320-3W-S-ce-j

Specifications may be subject to change

06/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com

RADITEK INC.

Ceramic Duplexer

code-j

890-915MHz / 935-960MHz, Model 4320, 3 Watts, Surface Mount

RDUP-890-915M-935-960M-4320-3W-S-ce-j

RECOMMENDED PC BOARD PATTERN

