


RADITEK INC.

DAB Filters


code-k

Band Pass Filter, 1452-1492MHz, 3 poles, 3 Watts, Surface Mount
RBPF-1452-1492M-3p-3W-S-m1

Top View

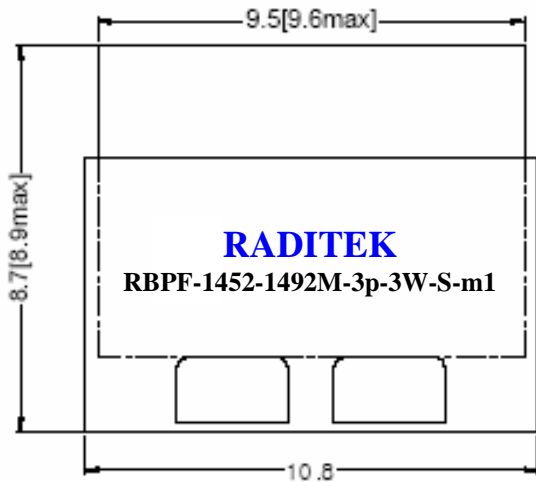

Bottom View

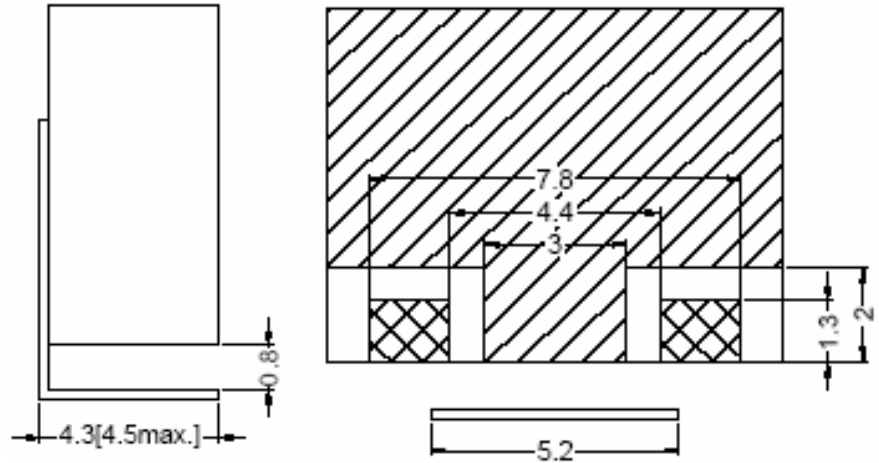

Tolerance unless otherwise specified : ± 0.2

Dimension unit : mm




Electrical Specifications		Units
Center Frequency:	1472	MHz
Poles	3	
Bandwidth	± 20	MHz
Insertion Loss	2.0	dB (max)
Ripple at Bandwidth	0.5	dB (max)
Return Loss	15.0	dB (min)
Attenuation @ 1344 MHz	45	dB (min)
Attenuation @ 1599 MHz	30	dB (min)
Input Power	3	Watts (max)
In/Out Impedance	50	Ohm
Temperature Range	-30 to +85	°C

RADITEK INC.

DAB Filters

code-k

**Band Pass Filter, 1452-1492MHz, 3 poles, 3 Watts, Surface Mount
RBPF-1452-1492M-3p-3W-S-m1**

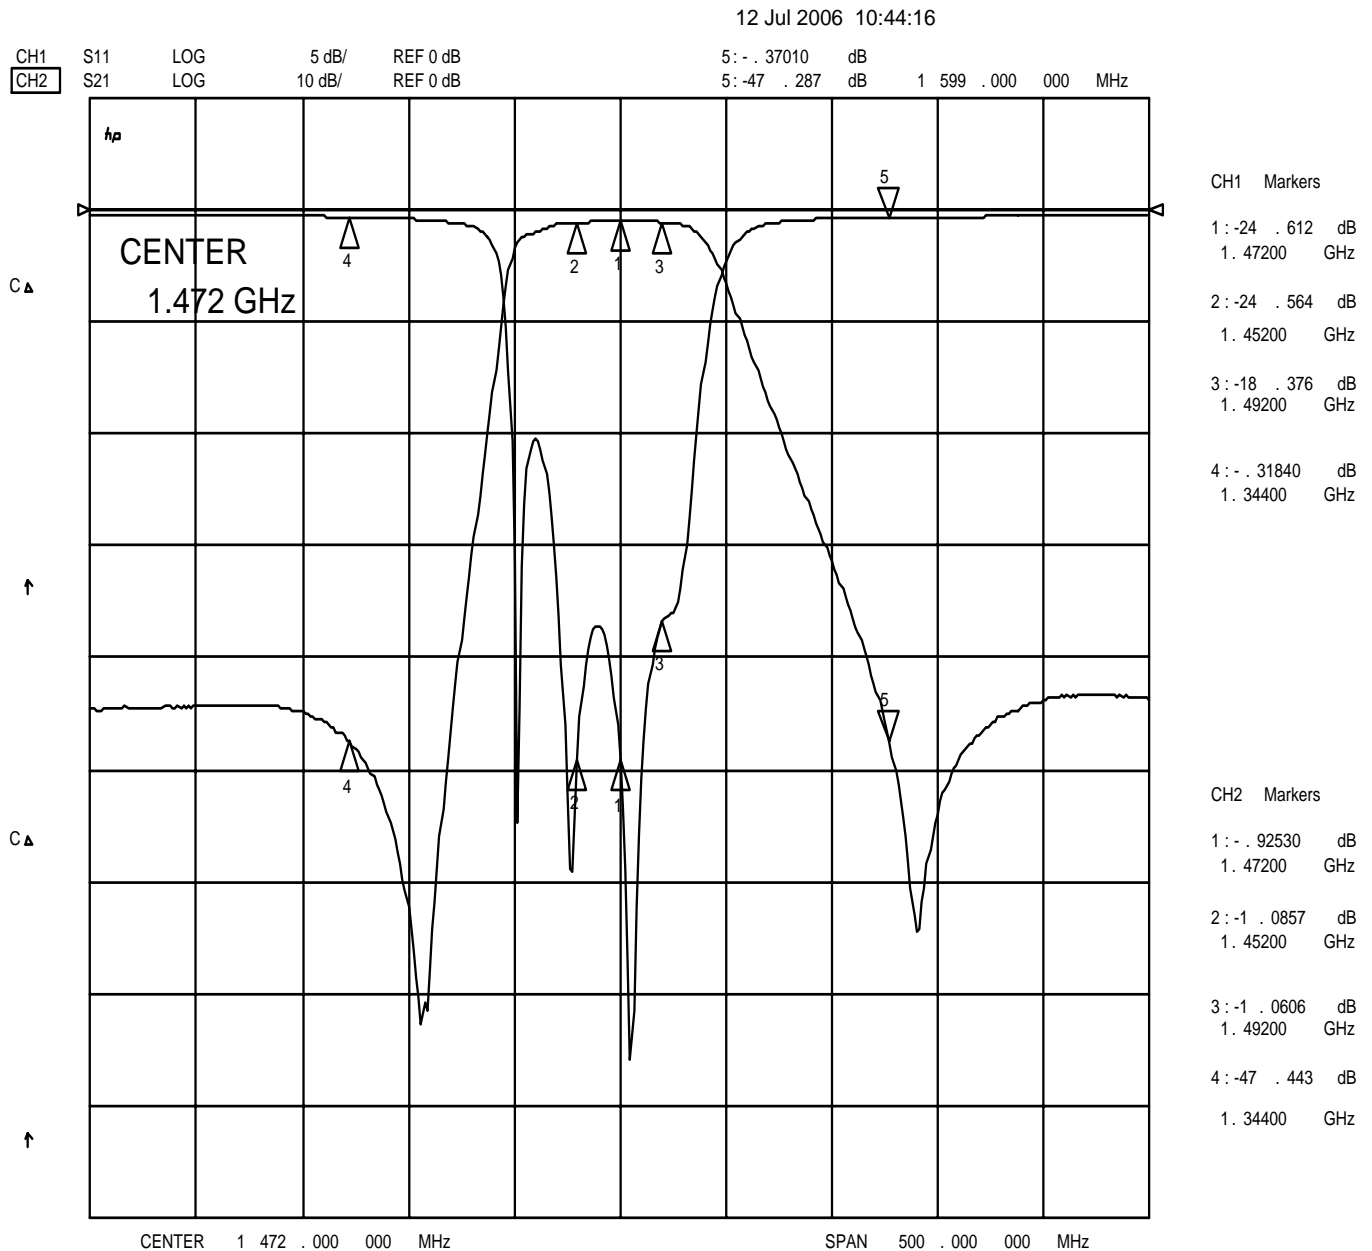

RBPF-1452-1492M-3p-3W-S-m1-k

Specifications may be subject to change

04/04/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com