


RADITEK INC.

Ceramic Band Pass Filter 470MHz to 490MHz, Model 2515, Surface Mount RBPF-470-490M-2515-S-k

code-k

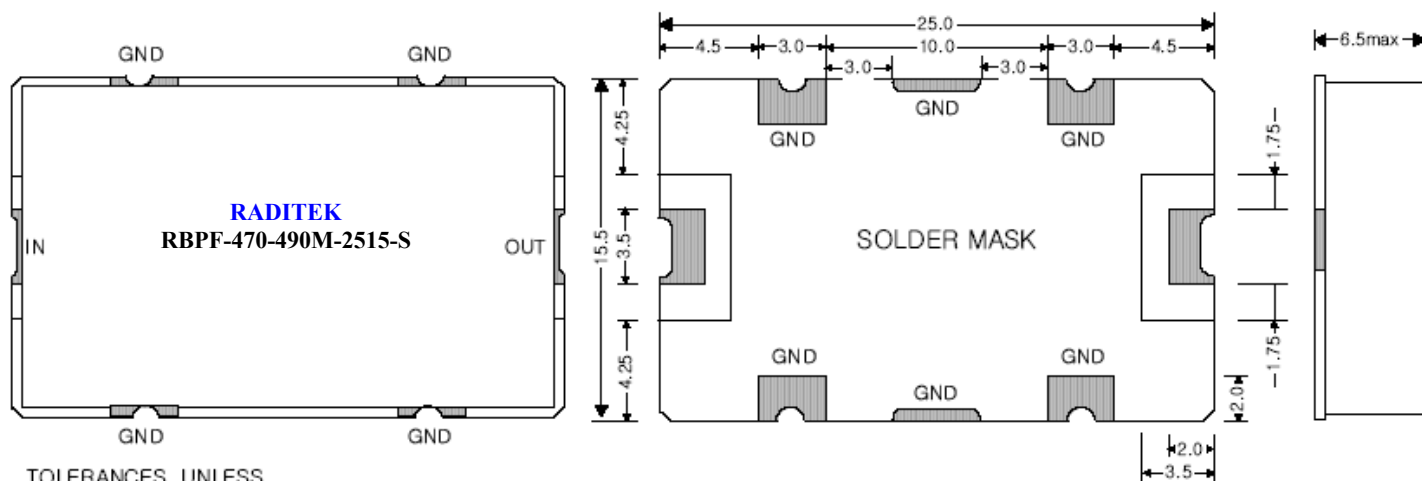

TOLERANCES UNLESS
OTHERWISE SPECIFIED : ± 0.2
UNIT: mm

Specifications		Units
Center Frequency	480	MHz
Bandwidth (BW)	20	MHz
1dB Bandwidth	50	MHz min
3dB Bandwidth	70	MHz min
Insertion Loss	3.0	dB max
VSWR in BW	1.4:1	
Ripple	0.5	dB max
Group Delay	50	ns
Attenuation	50dB @ DC-305MHz 50dB @ 325MHz 50dB @ 660MHz 50dB @ 680-1000MHz	
In/Out Impedance	50	Ω

RBPF-470-490M-2515-S-k

Specifications subject to change

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.



Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com

RADITEK INC.

Ceramic Band Pass Filter 470MHz to 490MHz, Model 2515, Surface Mount RBPF-470-490M-2515-S-k

code-k

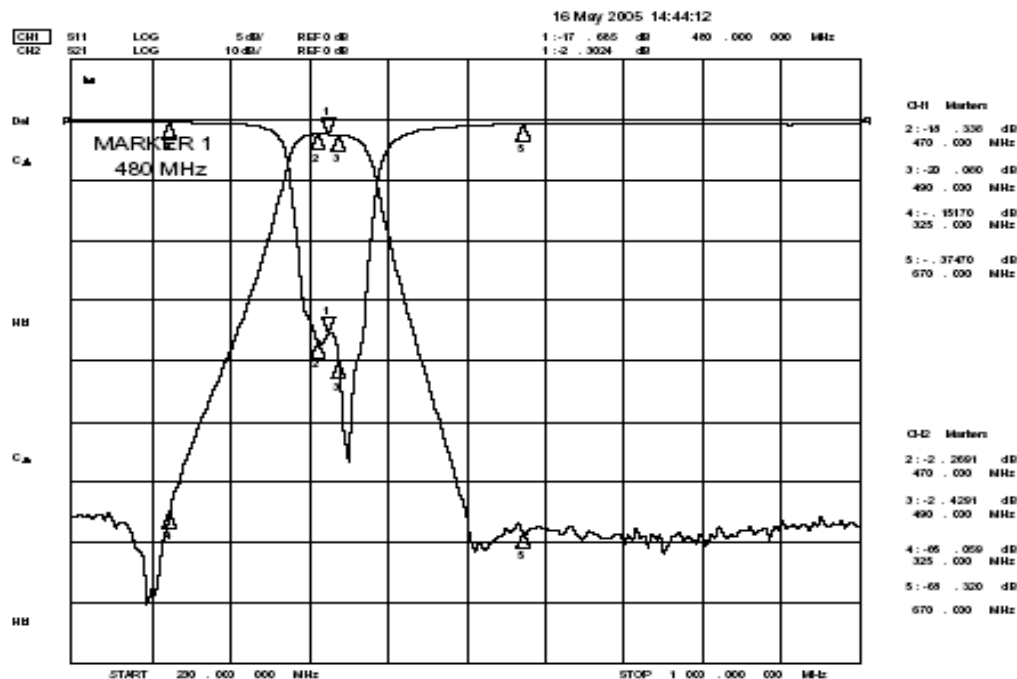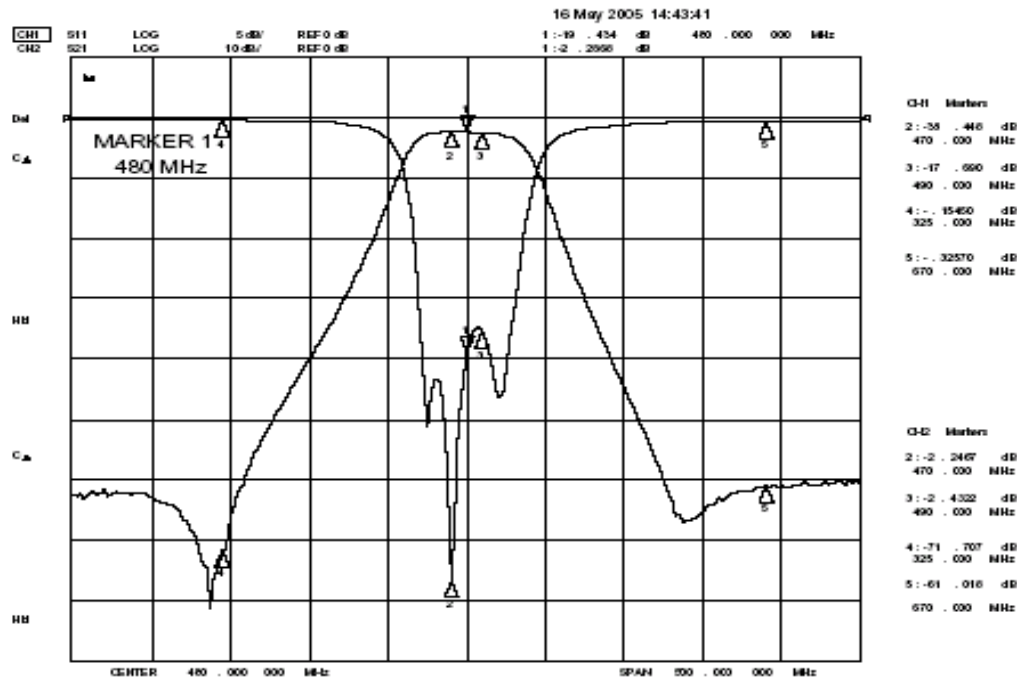

RBPF-470-490M-2515-S-k

Specifications subject to change

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.



Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com

RADITEK INC.

Ceramic Band Pass Filter 470MHz to 490MHz, Model 2515, Surface Mount RBPF-470-490M-2515-S-k

code-k

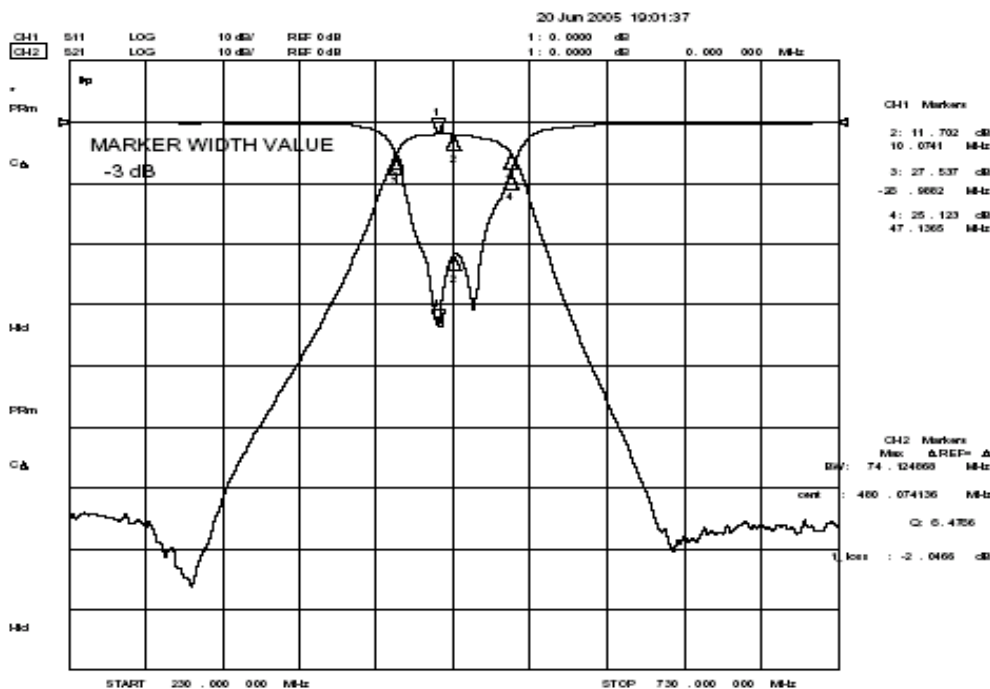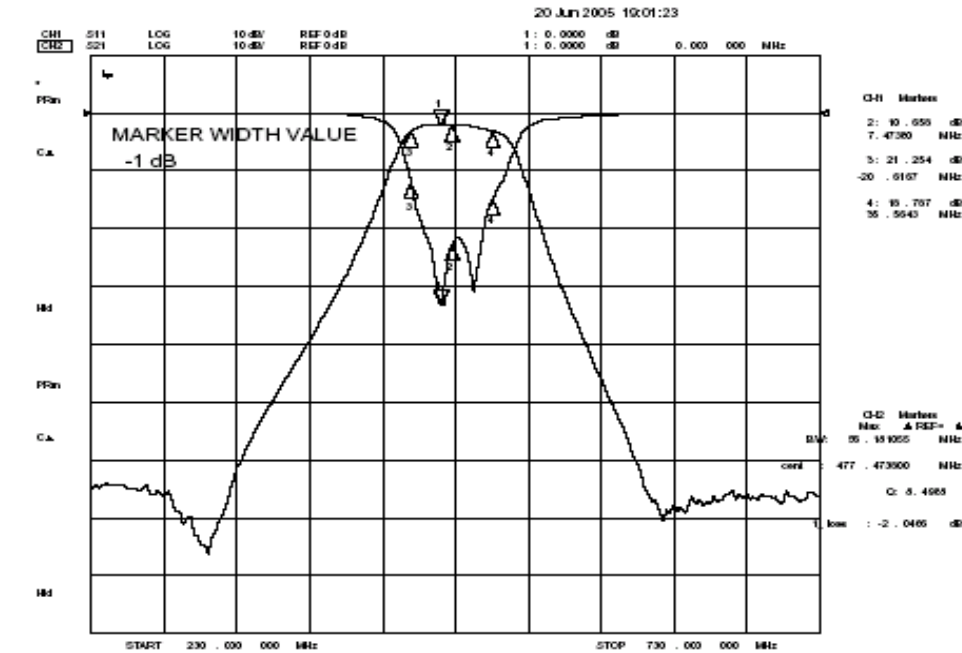

RBPF-470-490M-2515-S-k

Specifications subject to change

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com