


## Coaxial Circulator, 17-25 GHz, Split Bands, 2GHz Bandwidth Max K(2.9)mm Connector, 1-2 Watts RADC-f1-f2-Kx-1WR

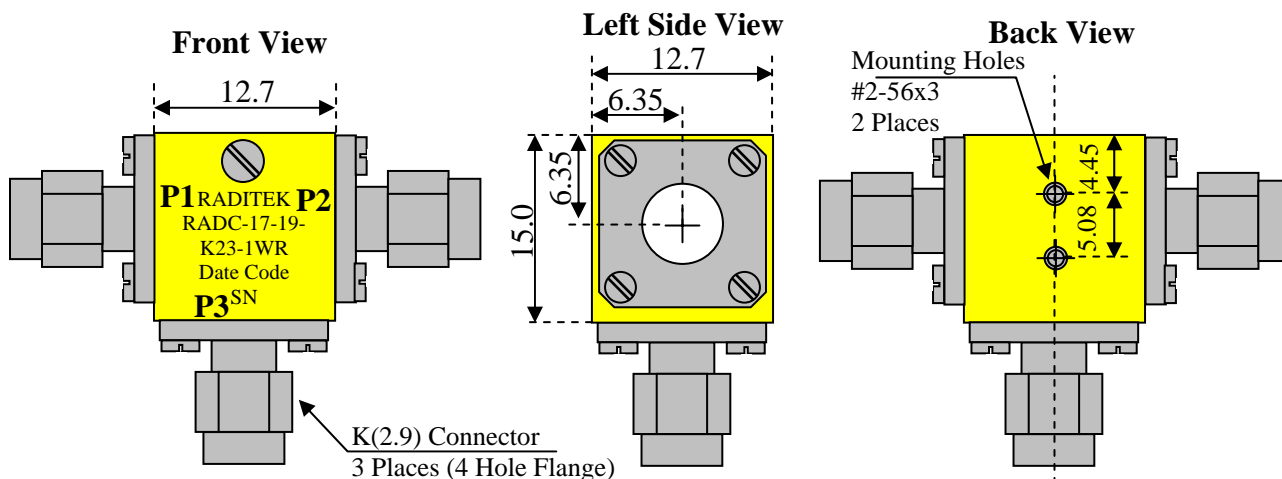

Direction of RF:	
<b>R</b>	Default
<b>L</b>	

Units: mm  
Not to scale

Order Examples: RADC-17-19-K23-1WR  
C=CIRCULATOR

K(2.9) Connector options (X)			
Circulator			
Port 1	Port 2	Port 3 Male	Port 3 Female
Female	Male	-11	-21
Male	Female	-12	-22
Female	Female	-13	-23
Male	Male	-14	-24

Specifications:					Units
Frequency	17-19	19-21	21-23	23-25	GHz
Bandwidth Max	2	2	2	2	GHz
Connector	K	K	K	K	
Insertion loss	1.4	1.4	1.4	1.4	dB
Isolation	18	18	18	18	dB
VSWR	1.45:1	1.45:1	1.45:1	1.45:1	
Power handling Forward	1	1	1	1	Watt
Power handling Reverse	1	1	1	1	Watt
Temperature range	-30 to +65	-30 to +65	-30 to +65	-30 to +65	°C