


## Coaxial Circulator, 40-45 GHz, Split Bands, 5% Bandwidth Max 2.4mm Connector, 1-2 Watts RADC-f1-f2-2.4x-1WR

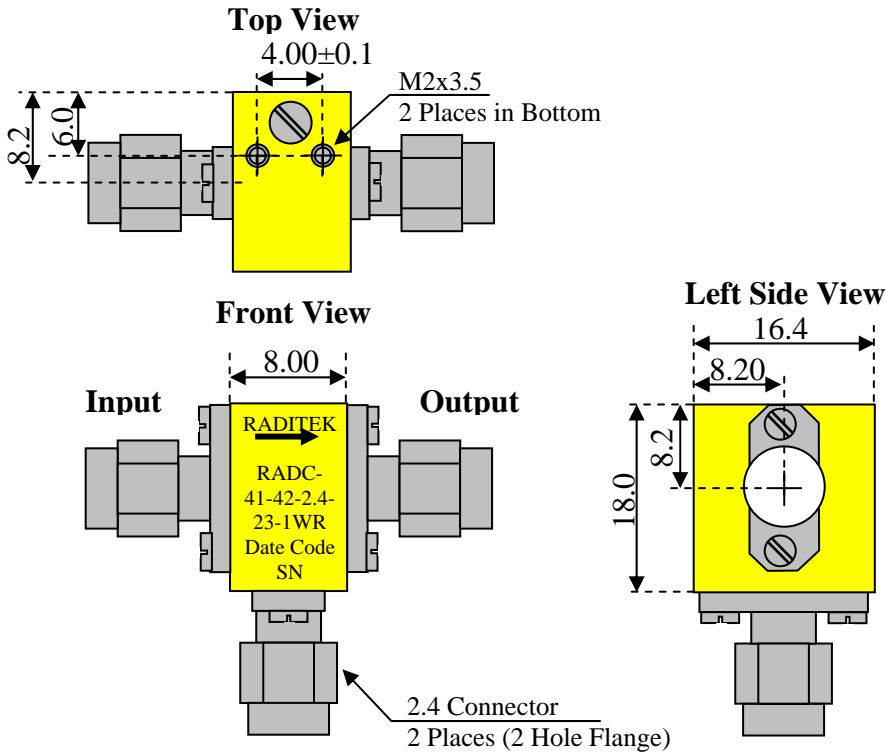

Direction of RF:	
<b>R</b>	Default
<b>L</b>	

Units: mm  
Not to scale

Order Examples: RADC-41-42-2.4-23-1WR  
C=CIRCULATOR

2.4 Connector options (X)			
Circulator			
Port 1	Port 2	Port 3 Male	Port 3 Female
Female	Male	-11	-21
Male	Female	-12	-22
Female	Female	-13	-23
Male	Male	-14	-24

Specifications:				Units
Frequency	40-45	41-43	43-45	GHz
Bandwidth	5%	Full	Full	%
Connector	2.4	2.4	2.4	
Insertion loss	1.6	1.6	1.6	dB
Isolation	18	18	18	dB
VSWR	1.50:1	1.50:1	1.50:1	
Power handling Forward	2	2	2	Watt
Power handling Reverse	2	2	2	Watt
Temperature range	-30 to +65	-30 to +65	-30 to +65	°C