


Coaxial Circulator or Isolator, 18-26.5GHz, Full Bandwidth SMA or K (2.9) / (2.4) Connectors, 1 Watt

RADC-18-26.5-K23-1WR

RADI-18-26.5-K3-1WR

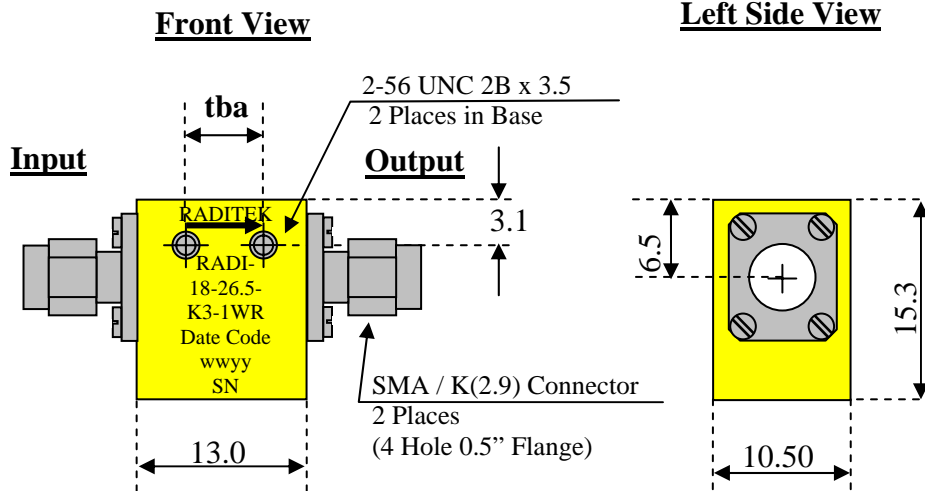

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: **RADI-18-26.5-K3-1WR**
I=ISOLATOR / C=CIRCULATOR

SMA / K(2.9) / (2.4) Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Option (-di) Drop In model; 0.9mm diameter pin same location as connector center pin

Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp Range °C	Connector
18-26.5	Full	1.0	16	1.5	1-2	1-2	-40 to +70	SMA/ K(2.9)/ (2.4)