


Isolator or Circulator 150-400MHz, SMA or N-Type Connectors 1W / 2W / 5W

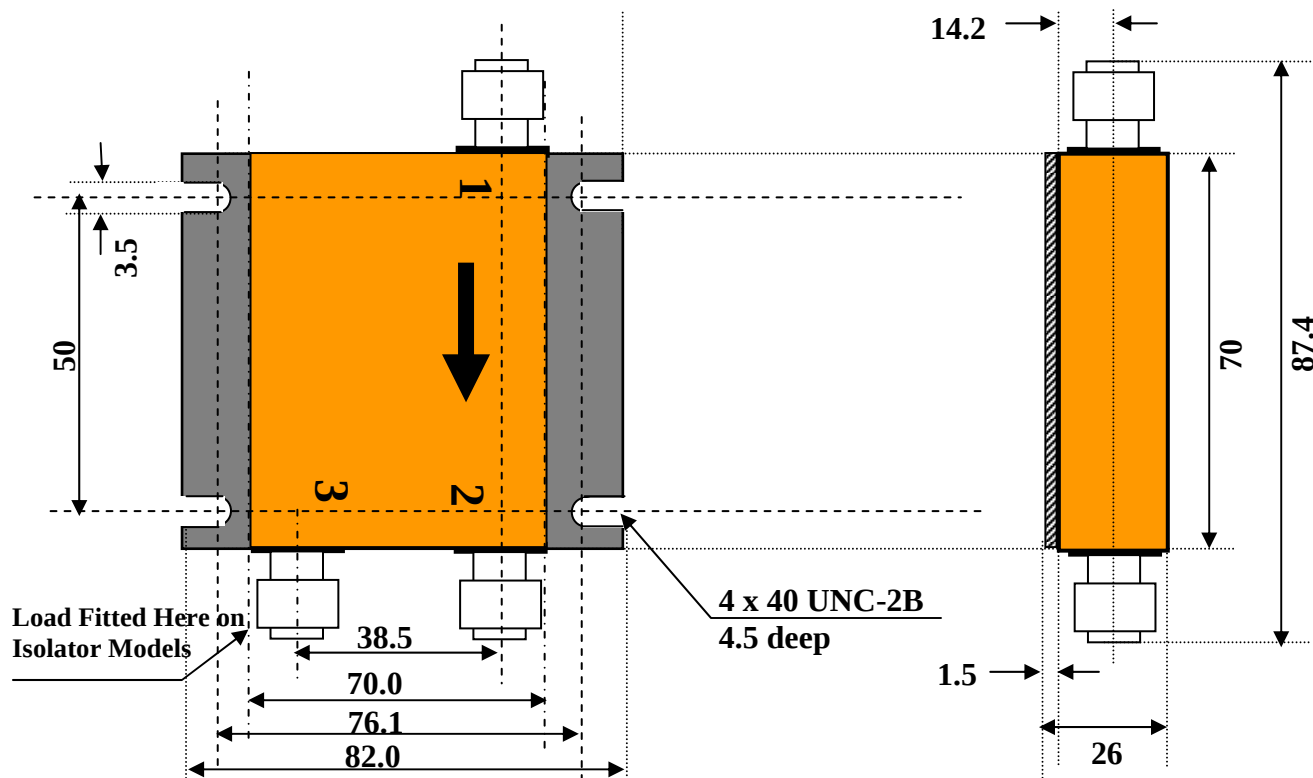

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

☛ Order Examples: RAD**I**-F1-F2M-SX-1WR

I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op.Temp °C	Connector
150-225	Full	0.8	17	1.35	1, 2	1, 2	-10 to +50	SMA
170-200	Full	0.7	18	1.30	2	2	-10 to +50	SMA
225-400	Full	1.5	15	1.50	50	5	-10 to +50	SMA
240-405	Full	1.5	15	1.50	50	5	-10 to +50	SMA or N
250-350	Full	1.5	15	1.50	50	5	-10 to +50	SMA or N