


Coaxial Isolator 174-230MHz, N-Type Connectors 100 Watts Reverse / 300 Watts Forward

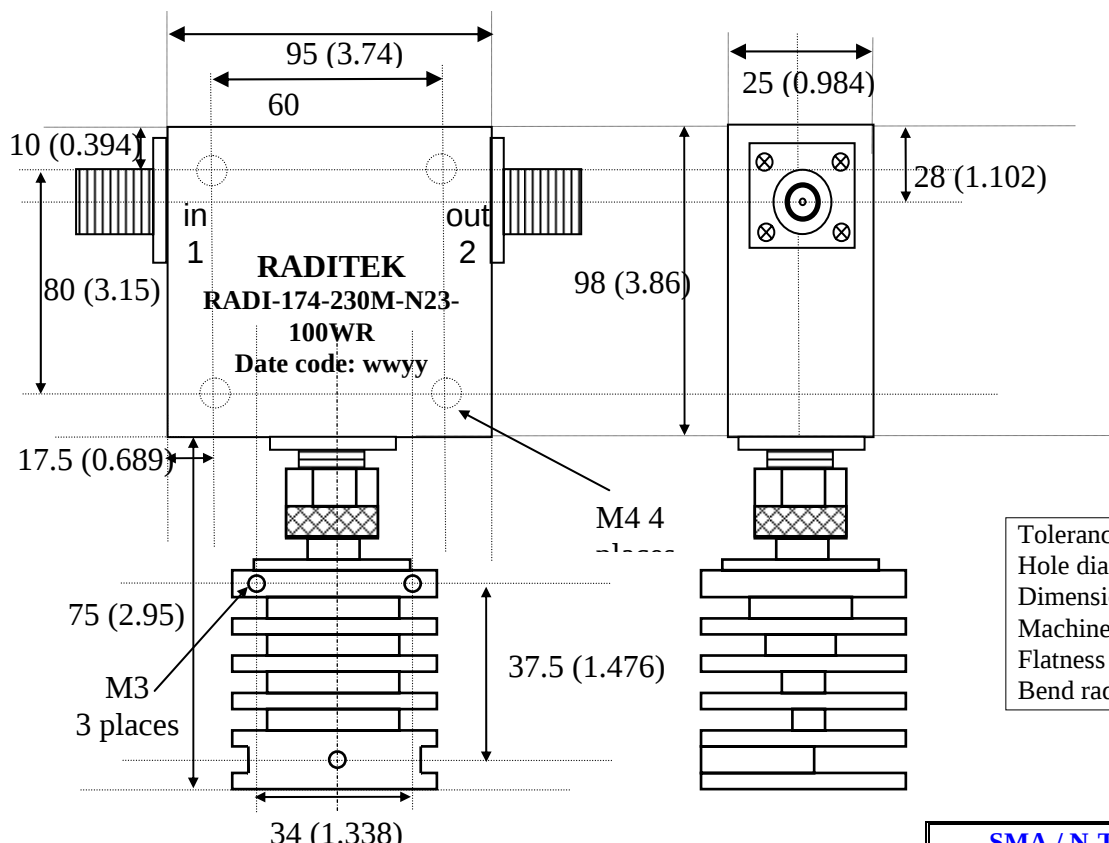

Tolerance (unless otherwise stated):
Hole diameter +/- 0.004
Dimensions +/- 0.015
Machined surfaces 63
Flatness 0.001/inch
Bend radius 1/32 inch

SMA / N-Type Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Direction of RF:	
R	Default
L	

Units: mm(Inches)
Not to Scale

Order Examples: **RADI-F1-F2M-SX-1WR**
I=ISOLATOR / C=CIRCULATOR

Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp Range °C	Connector
174-230	Full	0.4	20	1.25	300	100	-10 to +60	N-Type