


Coaxial Isolator, 26.0-28.0MHz, 40Watts, SMA Connectors RADI-26.0-27.0M-SX-40WR and RADI-27.0-28.0M-SX-40WR

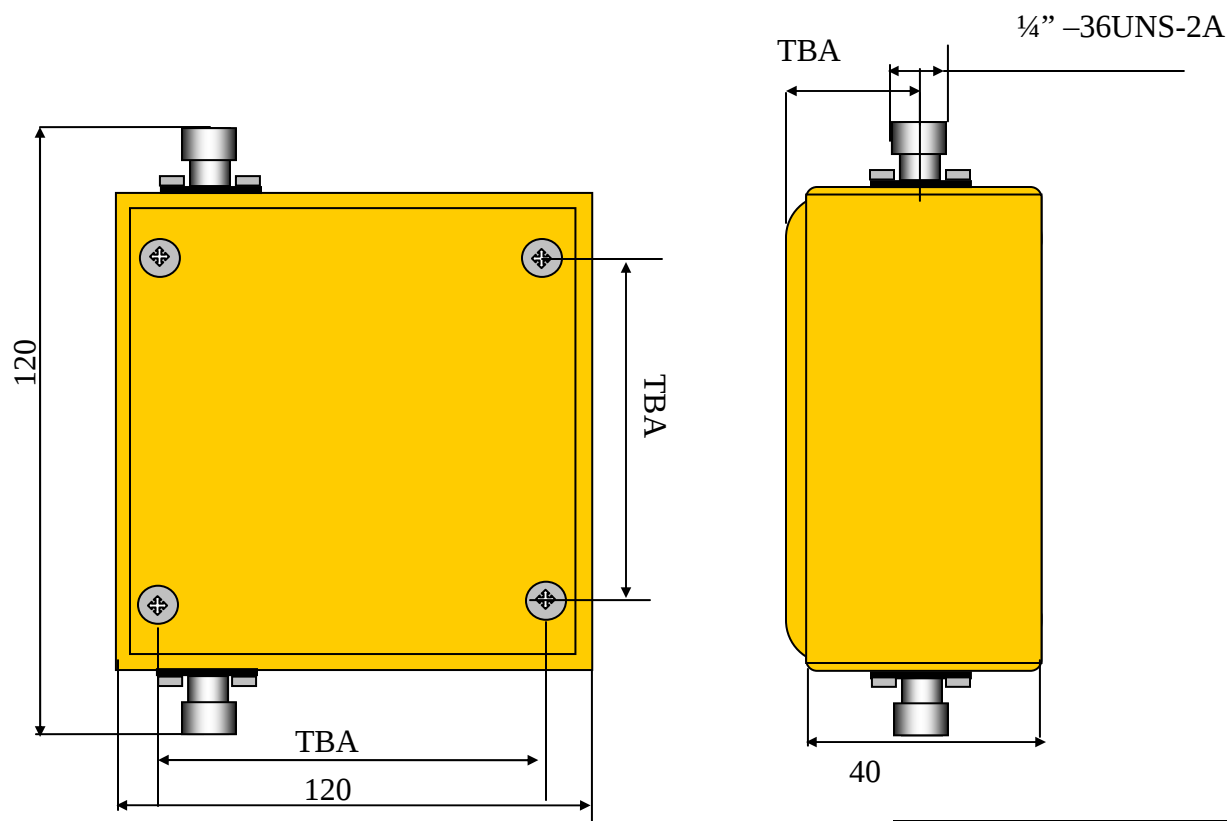

Direction of RF:	
R	Default 
L	

Units: mm(Inch)
Not to scale

Order Examples: RADI-F1-F2M-SX-40WR
I=ISOLATOR / C=CIRCULATOR

SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

SPECIFICATIONS:			Units
FREQUENCY:	26.0-27.0	27.0-28.0	MHZ
INSERTION LOSS:	0.9	0.9	dB
ISOLATION:	17	17	dB
VSWR:	1.35	1.35	
POWER: Forward	40	40	Watts
POWER: Reverse	40	40	Watts
TEMPRATURE:	+25 to +45	+25 to +45	Deg/C