



Coaxial Circulator, 13-15 GHz N-Type Connector, 70 Watts RADC-13-15-N23-70WR

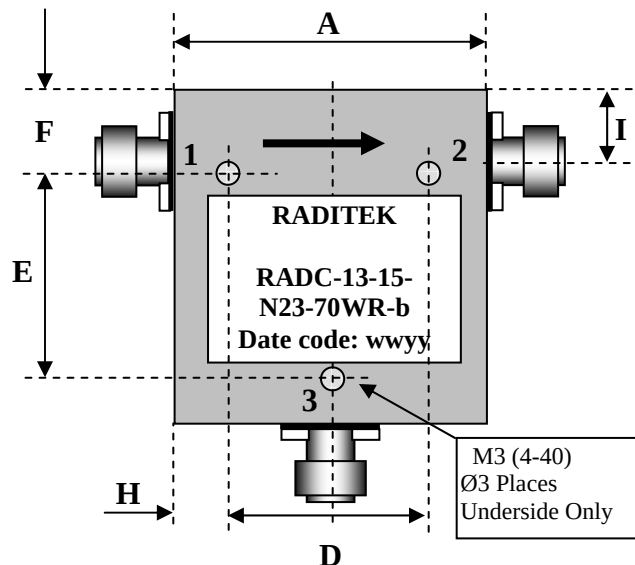

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

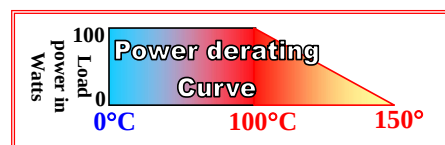

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RAD**C**-13-15-N23-70**WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	F	H	I	L	
34.6	37.1	22.3	25	20	12.3	tba	13.8	tba	mm
									mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Rated Power Watts	Temp °C	Connector
13-15	0.5	20	1.25	70	-40 to +80	N-Type