


Coaxial Circulator or Isolator, 4.9-5.1GHz

SMA Connector, 75 Watts


RADI-4.9-5.1-S3-75WR

ISOLATOR is a Circulator with a Connectorized Load

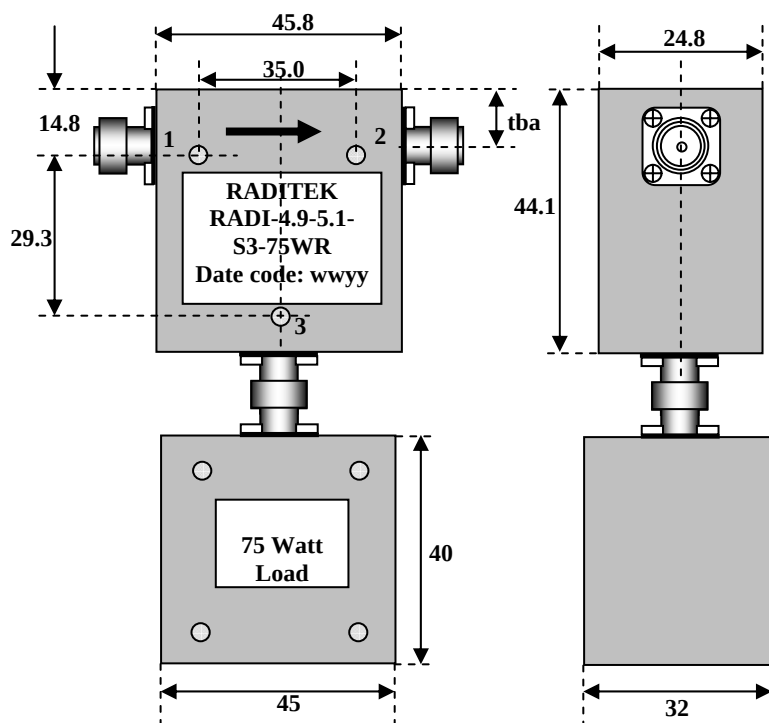

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	¹ / ₃₂ inch

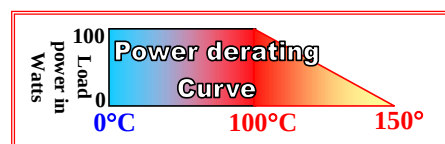

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

 **Order Examples: RADI-4.9-5.1-S3-75WR**

I=ISOLATOR / C=CIRCULATOR

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
4.9-5.1	0.4	20	1.25	75	75	tba	SMA