


Coaxial Isolator, 4.2-4.4GHz SMA Connector, 10 Watts RADI-4.2-4.4-S1-10WR

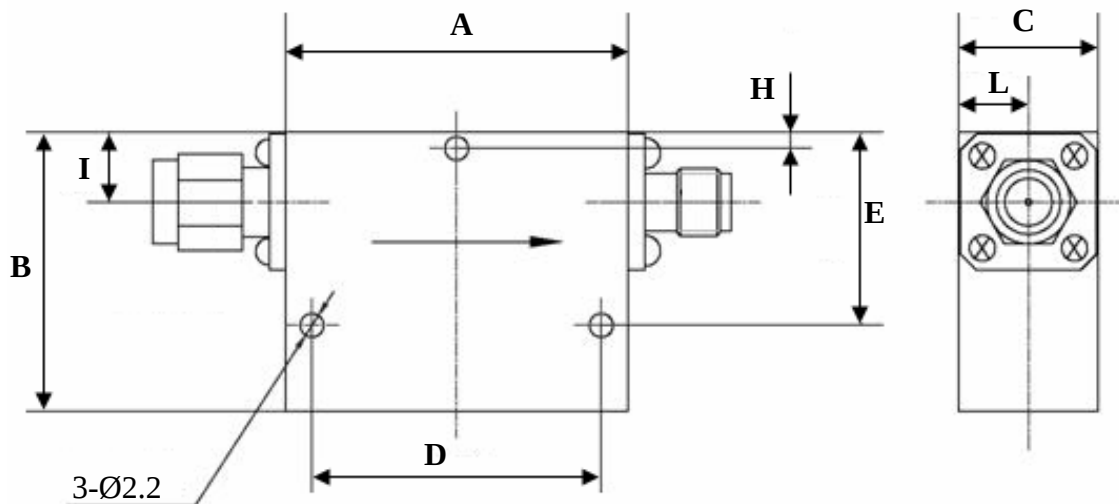

Direction of RF:	
R	Default 
L	

Units: mm
Not to Scale

Order Examples: RADI-4.2-4.4-S1-10WR
I=ISOLATOR / C=CIRCULATOR

SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

A	B	C	D	E	H	I	L	
32.0	26.0	13.0	27.0	18.0	1.5	6.5	6.5	mm

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
4.2-4.4	0.6 0.6	50 40	1.20 1.25	10	10	+25 -50 to +94	SMA