



Coaxial Isolator, 4.425-4.545GHz N-Type Connector, 60 Watts, (200W Forward), 250 Watt Peak RADI-4.425-4.545-N3-60WR(200W Fwd)

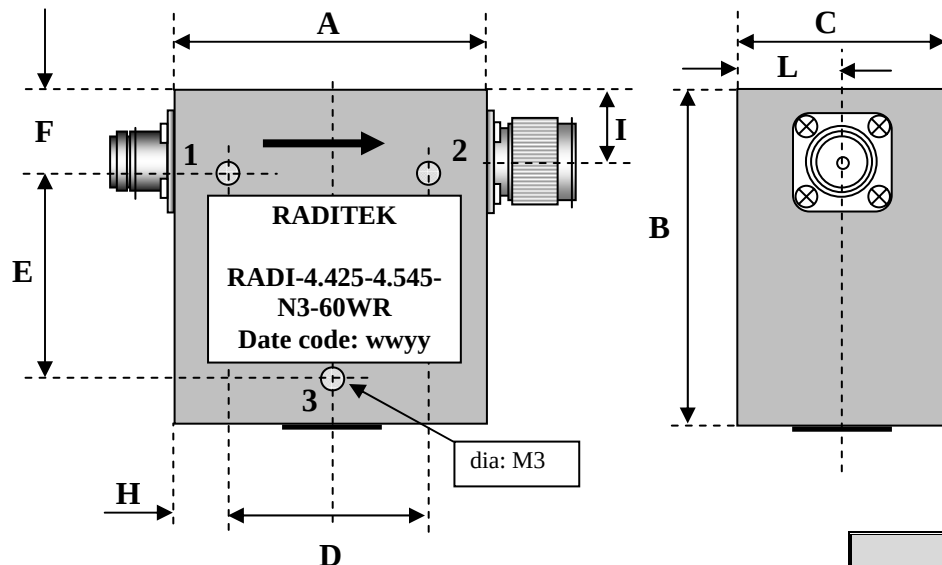

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

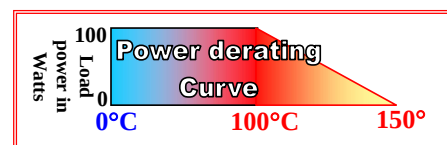

Direction of RF:	
R	Default →
L	←

Units: mm
Not to scale

Order Examples: RADI-4.425-4.545-N3-60WR(200W Fwd)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	45.8	45.2	24.4	35.0	25.5	14.8	tba	15.5	tba	mm
										mm

Size#	Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Power Peak Watts	Op. Temp °C	Connector
1	4.425-4.545	0.3	20	1.25	200	60	250	-40 to +70	N-Type