
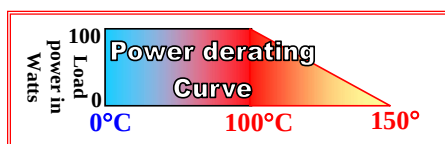
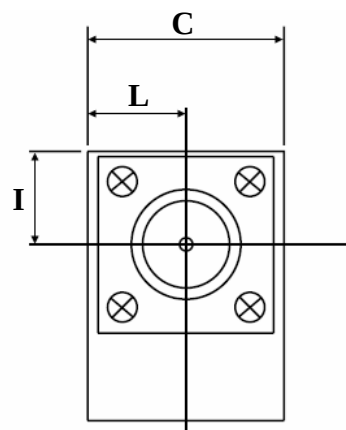


Coaxial Isolator, 5.8-7.0GHz, bd1 Model N-Type Connector, 10 Watts, (20 Watts Peak) RADI-5.8-7.0-bd1-N3-10WR(20W Peak)

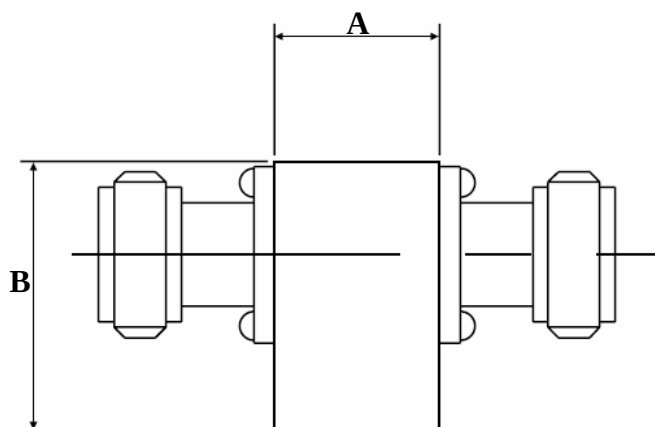

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RADI-5.8-7.0-bd1-N3-10WR(20W Peak)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	I	L	
1	16.0	26.0	19.0	9.0	9.5	mm
						mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Peak Watts	Temp °C	Connector
1	5.8-7.0	0.5	18	1.35	10	20	-40 to +80	N-Type